




# 30x Zoom Block Camera Technical Manual Full-HD

# skoopia 21Z30S

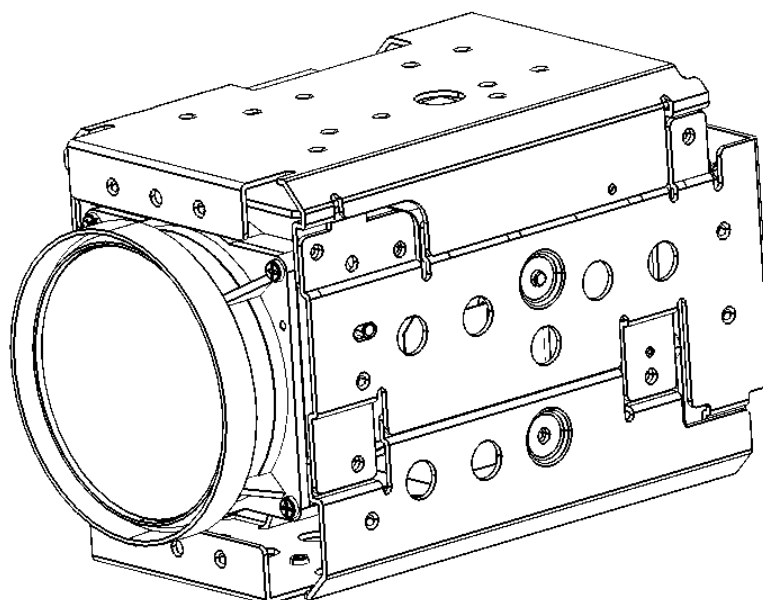

REV. F30F2312 -01





# 1. SAFETY INSTRUCTIONS

## Read Instructions

Read all of the safety and operating instructions before using the product.

## Retain Instructions

Save this instructions for later use.

## Cleaning

Unplug this appliance from wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.

## Water and Moisture.

Do not use this product near water or moisture.(For example. Near a bathtub, wash bowl, kitchen sink, or laundry tub, in a wet basement, or near swimming pool, etc.)

## Installation

Do not place this product on an unstable cart, stand, or table. The product may fall causing serious injury to a child or adult, and damage to the product. Use only with a cart or stand recommended by the manufacturer, or sold with the product. Mounting should follow the manufacturer's instructions, and should use a mounting accessory recommended by manufacturer.

## Power source

This Product should be operated only from the type of power source indicated on marking label. If you are not sure of the type of power supplied to your home, consult your dealer or local power company.

# 2. PRECAUTIONS

- **Do not use the camera in extreme temperature conditions.**
- **Do not use or store the camera in humid environment**  
It may cause poor image quality.
- **Do not use the camera in unstable lighting conditions.**  
Inconsistent lighting or flickering may cause poor image.
- **Never use the camera close to gas or oil leak.**  
It may not operate properly.
- **Do not disassemble the camera.**  
There is no user serviceable part inside.
- **Do not drop the camera or apply force on it.**  
It may cause a malfunction.
- **Never face the camera to strong light for long periods of time.**  
It may damage the CMOS sensor.
- **Do not expose the camera to rain or any types of liquid**  
If wet, wipe the moisture out immediately.  
Liquids can contain minerals that corrode the electronic components.



When this camera is installed near wireless communication devices that emits strong electromagnetic field, irregularity such as noise may appear in the image.

---





## INDEX

1.	SAFETY INSTRUCTIONS .....	2
2.	PRECAUTIONS .....	2
3.	FEATURES .....	4
4.	SPECIFICATION .....	5
5.	OPERATING CAMERA .....	6
	5.1. Camera OSD menu .....	6
	5.2. WHITE BALANCE .....	9
	5.3. EXPOSURE .....	9
	5.4. FOCUS .....	10
	5.5. BACK LIGHT.....	10
	5.6. IMAGE CONTROL.....	11
	5.7. DISPLAY CONTROL.....	11
	5.8. SYSTEM SETUP.....	12
	5.9. RESET.....	12
6.	Video Output Format.....	13
	6.1. Video Mode .....	13
	6.2. Output Timing Chart .....	14
7.	Camera Interface .....	23
	7.1. Camera Interface .....	23
	7.2. LVDS Interface .....	25
	7.3. Application of recommended circuit Camera Reception.....	27
	7.4. Key Application recommended circuit .....	29
8.	Dimensions.....	30
	APPENDIX A.....	31
	APPENDIX B .....	64





### 3. FEATURES

- 1/2.8 inch sony STARVIS CMOS image sensor (approx. 2.1 million effective pixels)
  - Progressive scan
- WDR (Wide Dynamic Range) Function
- Video signals output
  - HD LVDS : Digital ITU-R BT.1120 - YcbCr4:2:2 16bits
  - Analog : SD CVBS (NTSC/ PAL), 1.0Vp-p 75Ω, Composite
  - HD SDI(optional):
 

SMPTE 292M(1.485Gbps)	1920x1080p@25/30/29.97
	1920x1080i@50/60/59.94
	1280x720p@25/30/50/60/29.97/59.94
SMPTE 424M(2.97Gbps)	1920x1080p@50/60/59.94
- 30x optical zoom lens with F1.5 aperture(optical zoom + digital zoom = 360x)
- Day and Night
  - ICR for infrared cut filter
- Privacy Zone Masking function
- Communications protocol supported to be controlled remotely
  - SONY-VISCA, PELCO-P/D, etc
- High performance functions
  - 3D-DNR (Digital Noise Reduction)
  - BLC (Back Light Compensation)
  - Motion Detection
  - Defog
  - Image flip
  - HLC (High Light Compensation)





## 4. SPECIFICATION

21Z30S		SPECIFICATIONS
Sensor	Image Sensor	1/2.8" Progressive CMOS (2.1 mega)
	Scanning System	16:9 Progressive
	Sync. System	Internal
	Effective Pixel	1920(H) x 1080(V)
	Min. Illumination	0.02Lux (Day), 0.005Lux (Night), 0.0005Lux(DSS on)
	Horizontal Resolution	1000 TVL
Optics	Lens	30x optical Zoom, F=4.7~141 mm, F1.5(Wide) ~ F4.0(Tele)
	Zoom	30x optical zoom + 12x digital zoom = 360x
	Focus	Near/Far, Auto/Manual/One Push
	Angle of View(H)	59.0 degrees (wide end), 2.4 degrees (tele end)
	Min. working distance	100mm(wide end), 1500mm(tele end)
Functions	Back Light Compensation	WDR, BLC, HLC(High Light compensation)
	Exposure	Auto / Manual
	White Balance	Auto(3,000°K~8,000°K) / ATW(1,900°K~11,000°K) / Manual
	Day & Night System	AGC / TDN(ICR)
	Electronic Shutter	NTSC: 1/30~1/10000, PAL: 1/25~1/10000, DSS( ~ 1/1sec)
	Functions	Privacy Mask, Image Mirror, 3DNR, Flicker-less, Sharpness, Defog, DIS(Digital Image stabilizer), NegArt, Freeze
Video Outputs	Digital Output (LVDS)	1920x1080p@25/30/50/60    1920x1080p@29.97/59.94 (optional)
	ITU-R BT.1120	1920x1080i@50/60                    1920x1080i@59.94 (optional)
	YcbCr4:2:2 16bits	1280x720p@25/30/50/60    1280x720p@29.97/59.94 (optional)
	SDI(optional)	SMPTE 292M(1.485Gbps): 1080p@25/30/29.97 1080i@50/60/59.94 720p@25/30/29.97/50/60/59.94 SMPTE 424M(2.97Gbps): 1080p@50/60/59.94
CVBS	Analog Composite(1V ± 0.2 Vp-p) NTSC/PAL	
Control Interface	UART(5V level)	PELCO-P/D, SONY-VISCA protocol
		8bits data, 1 stop bit, no parity, 2400~115200bps
General	Operation Temperature	-20℃ ~ 60℃
	Power Input	12VDC (7V to 15VDC)
	Power consumption	Max 5W (3.2W Lens inactive, 3.9W Lens active)
	Mass	Approx. 250g (8.8 oz.)
	Dimensions	96.6(D) x 50.0(W) x 60.0(H) mm





## 5. OPERATING CAMERA

### 5.1. Camera OSD menu

WB CONTROL	MODE	AWB / ATW / PUSH / INDOOR / OUTDOOR / MANUAL		
	PUSH			
	RED	0 ~ 100		
	BLUE	0 ~ 100		
AE CONTROL	MODE	AUTO/SHUT PRI/IRIS PRI/AGC PRI/BRIGHT/MANUAL		
	SHUT	/30/60/90/100/125/180/250/350/500/725/1000/1500/2K/3K/4K/6K/10K		
	IRIS	F1.6 ~ F16		
	AGC	0 dB ~		
	AGC LIMIT	0 ~ 15		
	SENS UP	OFF ~ X15		
	EXP COMP	0 ~ 14		
	FLICKERLESS	OFF/ AUTO/ ON		
FOCUS CONTROL	FOCUS MODE	AUTO/ MANUAL		
	PUSH	PRESS OK		
	AF MODE	NORMAL/ INTERVAL/ ZOOM TRIG		
	WIDE LIMIT	X1 ~X29		
	TELE LIMIT	X2 ~X30		
	DZOOM	OFF/ ON		
	ZOOM SPEED	0 ~ 7		
	NEAR LIMIT	0.5M/ 1M/ 2M/ 3M/ 5M/ 10M/ 30M		
	AF INTERVAL	0 ~ 255		
	MACRO LENS	OFF/ ON		
	AF AREA/SIZE	USER MODE	OFF/ ON	
		WIDTH	4~24	
		HEIGHT	4~16	
		MOVE HOR	0~39	
MOVE VER		0~25		



BACK LIGHT	BACKLIGHT	BLC	LEVEL	0~255	
			DISPLAY	OFF/ ON	
			WIDTH	0~48	
			HEIGHT	0~33	
			MOVE HOR	0~48	
			MOVE VER	0~33	
		HLM	AREA DISPLAY	OFF/ ON	
			LEVEL	0~20	
			BLACK MASK	OFF/ ON	
			WIDTH	0~48	
			HEIGHT	0~33	
			MOVE HOR	0~48	
		SPOT AE	DISPLAY	OFF/ ON	
			WIDTH	0~48	
			HEIGHT	0~33	
			MOVE HOR	0~48	
		WDR	OFF/ ON		
	DWDR	STRENGTH	0 ~ 16		
		SATURATION	0 ~ 16		
		LOCAL RATIO	0 ~ 16		
		SAT. SYNC	OFF/ ON		
		AUTO LEVEL	LOW/ MID/ HIGH		
	DEFOG	STRENGTH	0 ~ 16		
		THRESHOLD	0 ~ 3		
		AUTO LEVEL	LOW/ MID/ HIGH		
	IMAGE CONTROL	COLOR LEVEL	0 ~ 20		
SHARPNESS		0 ~ 20			
CONTRAST		0 ~ 20			
HUE		-10 ~ 0 ~ 10			
IMAGE EFFECT		OFF/ NEGA/ GRAY			
IMAGE FLIP		OFF/MIRROR/V-FLIP/ROTATION			
DNR		MODE	OFF/ 2D/ 3D/ 2D+3D		
		3DNR LEVEL	LOW/MID/HIGH/AUTO		
		2DNR LEVEL	LOW/MID/HIGH/AUTO		
		APERTURE	0~4		
GAMMA		DEFAULT/1.0 ~ 0.4			
GAMMA OFFSET		-64 ~ 64			
COLOR SUPPRESS		OFF/ LOW/ MID/ HIGH			
LENS SHADING		OFF/ ON			
BRIGHTNESS	0 ~ 20				



DISPLAY	DAY/NIGHT	MODE	AUTO/ DAY/ NIGHT
		DELAY [SEC]	0 ~ 60
		D->N LEVEL	0 ~ 28
		N->D LEVEL	0 ~ 27
		NIGHT COLOR	OFF/ ON
		COLOR BURST	OFF/ ON
	CAM TITLE	OFF/ ON	
	ZOOM MAG	OFF/ ON	
	PRIVACY	MODE	OFF/ ON
		TYPE	SQUARE/ POLYGON
		MASK NO.	MASK1 ~ MASK8
		DISPLAY	OFF/ ON
		COLOR	BLK/WHT/GRN/BLE/RED/CYAN/MAG/YEL/GRAY1~6,MOSAIC
		POLY SELECT	L-TOP/ R-TOP/ L-BOT/ R-BOT
		POSITION HOR	0~255
		POSITION VER	0~216
		WIDTH	0~120
		HEIGHT	0~68
	MOTION	AREA	1 ~ 4
		AREA ACTIVE	OFF/ ON
		AREA DISPLAY	OFF/ ON
		SIZE POSITION	
		SENSITIVITY	0 ~ 40
		MOTION VIEW	OFF/ ON
	DEFECT PIXEL	OFF/ON/STATIC/FIXED	
	IMAGE STABILIZER	OFF/ ON	
	SYSTEM SETUP	RS232C	CAM ID
ID DISPLAY			OFF/ON
BAUDRATE			2400/4800/9600/19200/38400/115200
SAVE			
OUTPUT FORMAT		1080P60/59/50/30/29/25 1080I60/59/50 720P/60/59/50/30/29/25	
DOOR MODE	INDOOR / OUTDOOR		
VER.			
RESET	MODE	FACTORY / USER	
EXIT			





## 5.2. WHITE BALANCE

**AWB** : Color temperature is automatically adjusted to 3,000°K ~ 8,000°K

**ATW** : Color temperature is automatically adjusted to 1,900°K ~ 11,000°K

**INDOOR** : Color temperature is manually adjusted to indoor

**OUTDOOR** : Color temperature is manually adjusted to outdoor

**MANUAL WB** : Color Temperature is manually adjustable to adjusting value.

RED and BLUE gain can be changed for better pictures.

**PUSH WB** : Color Temperature is manually adjustable to adjusting value.

The One Push White Balance mode is a fixed white balance mode that may be automatically readjusted only at One Push Trigger, while the camera is directed at a piece of white paper to obtain the optimum state under current illumination.

One Push White Balance data is lost when the power is turned off. If the power is turned off, reset One Push White Balance.

**SPOT AWB** : Spot AWB sets the camera to use an even smaller area of the AWB sensor.

## 5.3. EXPOSURE

**MODE** :

AUTO – Iris, gain and shutter can be controlled automatically.

MANUAL – Manual control of Iris, gain and shutter.

SHUTTER Priority – Manual control of shutter. Iris and gain can be controlled automatically.

IRIS Priority - Manual control of IRIS. Shutter and gain can be controlled automatically.

BRIGHT – Iris and gain can be controlled by control of brightness

**SHUTTER** :

Auto – Shutter controls exposure automatically when iris is manual.

Manual - Shutter is fixed, and gives the exposure control priority to other resources.

**IRIS** :

Auto - Iris controls exposure automatically, and shutter is fixed.

Manual - Iris is fixed, and gives the exposure control priority to other resources.

**AGC LIMIT**: To select maximum automatic gain limit.

Camera raises up gain to selected gain limit when dark conditions.

**EXP COMP** :

The exposure compensation function adjusts gain and iris, to keep a brightness level.

**SENS UP** :

Minimum slow shutter limit is down to 1/1 second.

The value means seconds.

Camera make Shutter speed longer to selected shutter limit when dark conditions.



**FLICKERLESS :**

This function used only for specific country to remove light flickering when light appears to flutter.

**5.4. FOCUS**

The camera employs a 30x optical zoom lens combined with a 12x digital zoom function. This camera allows you to zoom up to 360X.

**Optical 30x, f = 4.7 mm to 141 mm (F 1.5 to F 4.0)**

**Digital Zoom :** enlarges of the subject

**Combined Mode**

After the optical zoom has reached its maximum level, the camera switches to Digital Zoom Mode.

**Separate Mode**

Optical Zoom and Digital Zoom can be operated separately.

You can use digital zoom magnification while also any level of optical magnification.

**7 levels of zoom speed****FOCUS MODE :**

**Auto mode** automatically adjusts the focus position.

**Manual mode** adjusts the focus position by manual and when zoom is changed.

**AF MODE :**

**Normal mode** automatically adjusts the focus position.

**Interval mode** adjusts the focus position at time interval and when zoom is changed.

**Zoom trig mode** adjusts the focus position when zoom is changed.

**ONE PUSH :** When One Push AF command is sent, camera becomes Auto Focus mode to adjust focus position for a while. After it stops, mode becomes that for Manual focus mode.

**NEAR LIMIT :** Priority for focusing distance. The lens moves to adjust the focus from the distance.

**SPOT FOCUS :** Spot focus sets the camera to use an even smaller area of the AF sensor.

**5.5. BACK LIGHT**

**BACKLIGHT :** When background is too bright behind the object, the BLC make clearer object.

HLM - Highlight suppression reduce too bright light by masking it with specific color.

**WDR :** When background is too bright behind the object, the WDR make clearer images of the background as well as the object. Wide dynamic range produce images that combining long-exposure signals (normal shutter) with the signals of the high-intensity portions obtained with a short exposure(high-speed shutter).

**DWDR :** Dark areas of image brightness correction.





**DEFOG** : This function affects the effect of fog removal. Furthermore, it improves visibility by removing fog, clouds, smoke, and dust.

## 5.6. IMAGE CONTROL

### COLOR LEVEL

Color level is the colorfulness of a color relative to its own brightness.

### SHARPNESS

As you increase this value, the picture outline becomes stronger and clearer. Adjust this value appropriately depending on the sharpness of the picture.

### IMAGE FLIP

Video output is set horizontally vertically, and rotate.

### DNR

2D/3DNR reduces video noises at low ambient light.

### SHADING

Image center and the outskirts of brightness difference correction

### GAMMA

Video out brightness correction function- smoothly black transitions to white on a digital display.

### COLOR SUPPRESS

Color suppress reduces color noise in low illumination conditions.

### BRIGHTNESS

The compensation of the brightness of the image.

## 5.7. DISPLAY CONTROL

### DAY / NIGHT

- **AUTO** : Auto day/night mode automatically switches between Color and Black/White depending on darkness. ICR(IR cut) filter is removed when it switches to black/white.
  - D->N level – This level is threshold for switching day to night.
  - N->D level – This level is threshold for switching night to day.
  - Delay(Dwell) time - Checking time for condition of light to confirm changing to Color and Black/White.
  - Color Burst – Color burst off makes that the color burst is removed when ICR switches to black/white.
- **DAY** : The camera keeps color mode constantly.





- **NIGHT** : The camera keeps black/white mode constantly.

#### **CAM TITLE**

OSD character camera name settings..

#### **ZOOM MAGNIFICATION**

Display the Zoom scale.

#### **PRIVACY**

It is possible to set the size of the area and a video Mask.

#### **MOTION**

Video zone settings and sensitivity can be set.

#### **IMAGE STABILIZER**

This function reduces image blurring associated with the motion of a camera.

### **5.8. SYSTEM SETUP**

#### **CAM ID**

The camera is capable of recognizing number setting up 1 to 255.

#### **BAUDRATE**

Camera communication bit rate.

#### **OUTPUT FORMAT**

Video output specification set(NTSC/PAL) and video size settings(1080p/720p)

#### **DOOR MODE**

Set Indoor or Outdoor mode to get better video quality and auto focusing performance.

### **5.9. RESET**

Camera returns into initial value except ID and baudrate.





## 6. Video Output Format

### 6.1. Video Mode

Video output :

1080p - 2200x1125@30/60/29.97/59.94 fps, 2640x1125@25/50fps


1080i - 2200x562(563)@60/59.94 fps, 2640x562(563)@50fps

720p - 1650x750@60/59.94 fps, 1980x750@50fps, 3300x750@30/29.97 fps, 3960x750@25fps

Pixel clock : 74.25MHz, 74.25/1.001 MHz, 148.5MHz, 148.5/1.001 MHz

YCbCr422 16bits data(BT.1120 format), HD, VD


Active area (1920 x 1080)

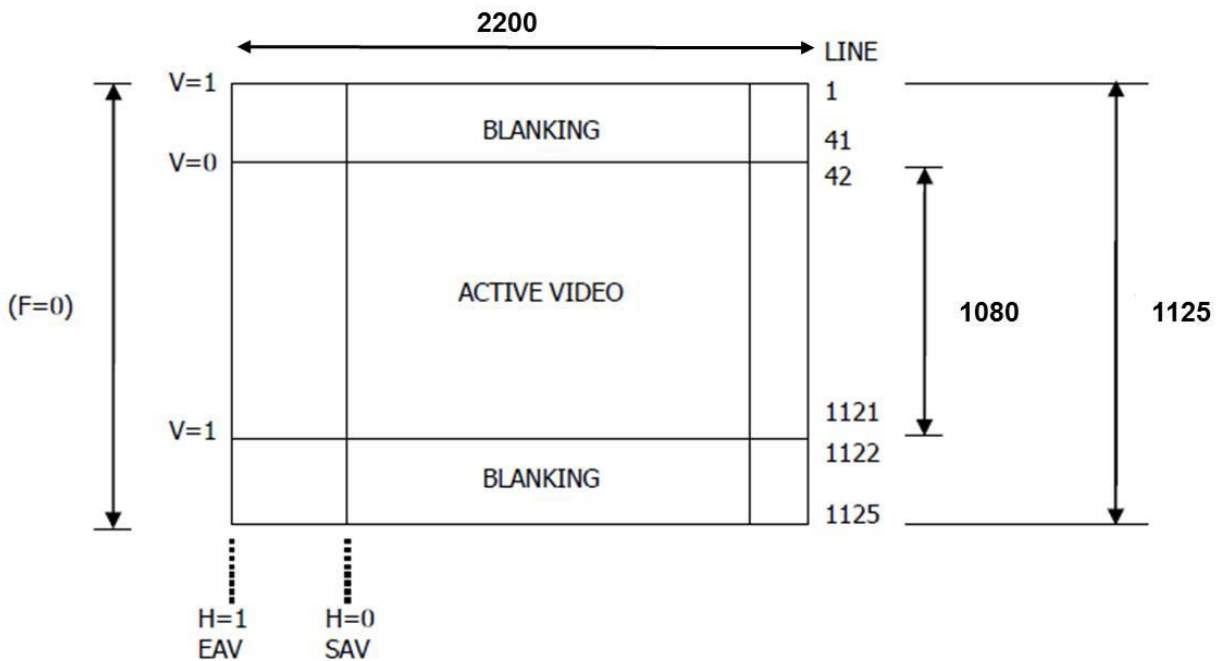





## 6.2. Output Timing Chart

### Output Timing Chart(1920x1080p@30/60/29.97/59.94)

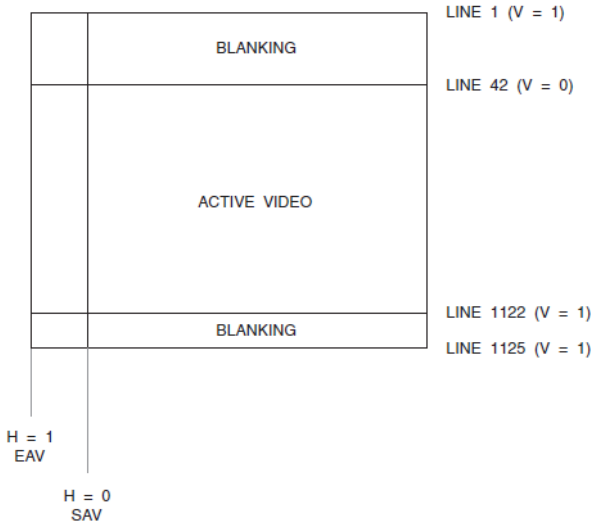


LINE NUMBER	F	V
1-41	0	1
42-1121	0	0
1122-1125	0	1

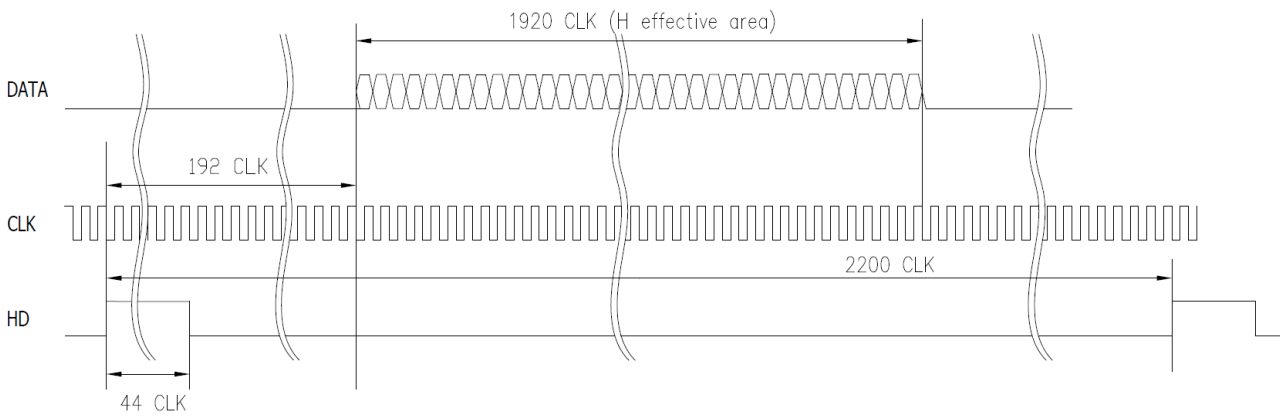
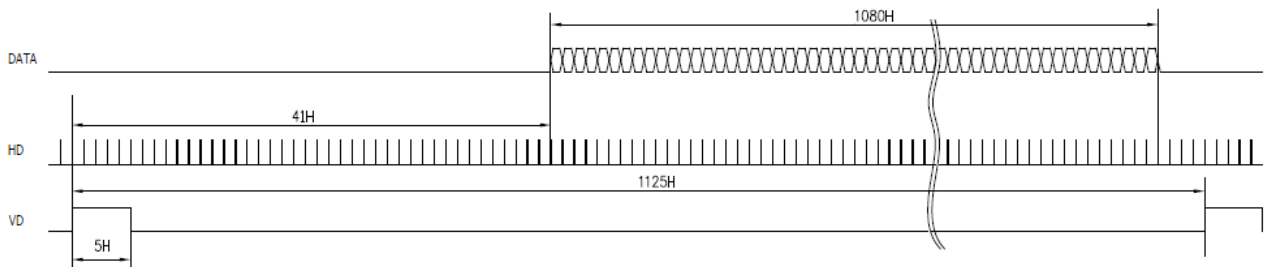




### Output Timing Chart(1920x1080p@25/50)

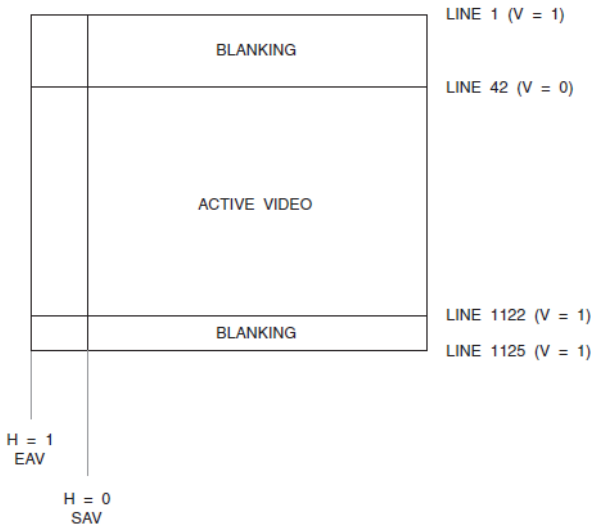


LINE NUMBER	F	V
1-41	0	1
42-1121	0	0
1122-1125	0	1

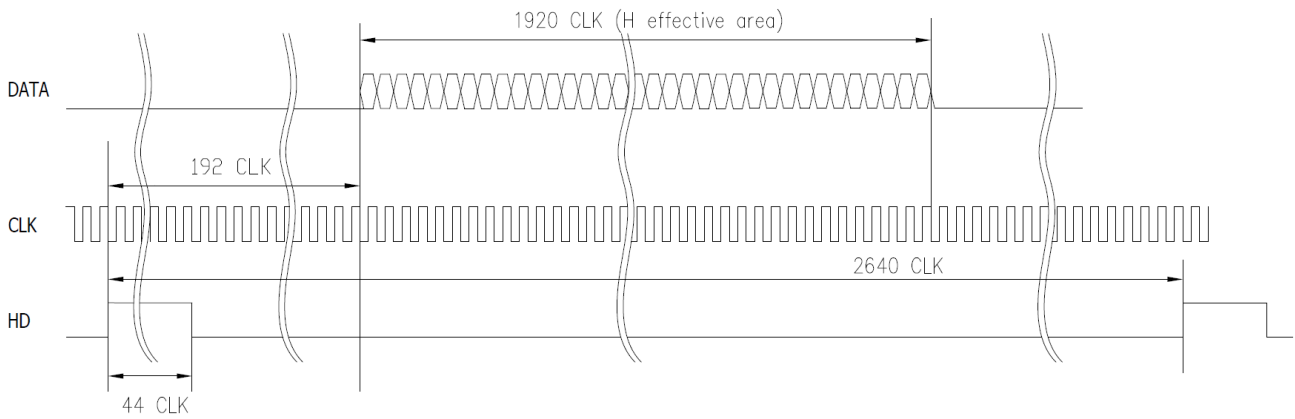
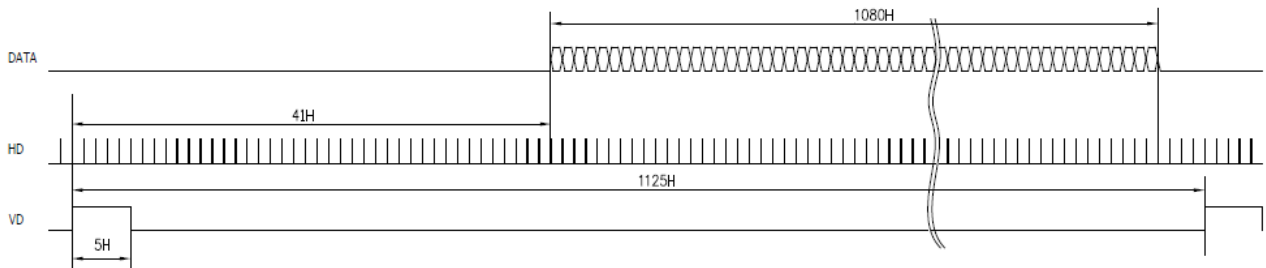




### Output Timing Chart(1920x1080i@60/59.94)

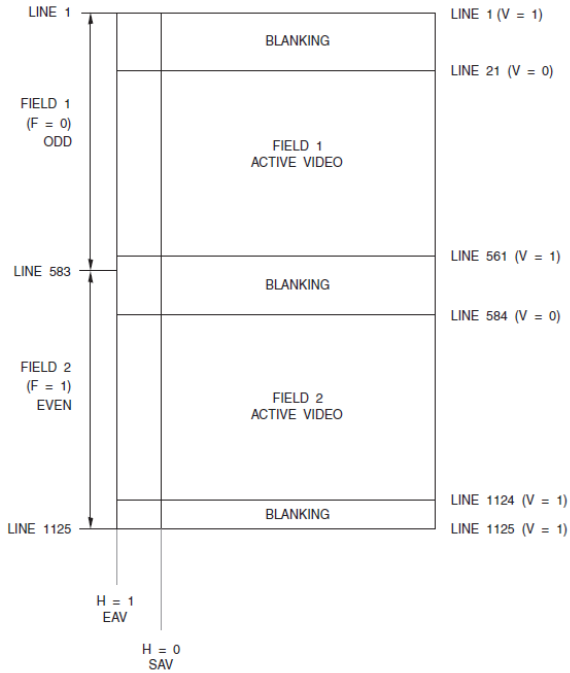


LINE NUMBER	F	V
1-20	0	1
21-560	0	0
561-562	0	1
563-583	1	1
584-1123	1	0
1124-1125	1	1

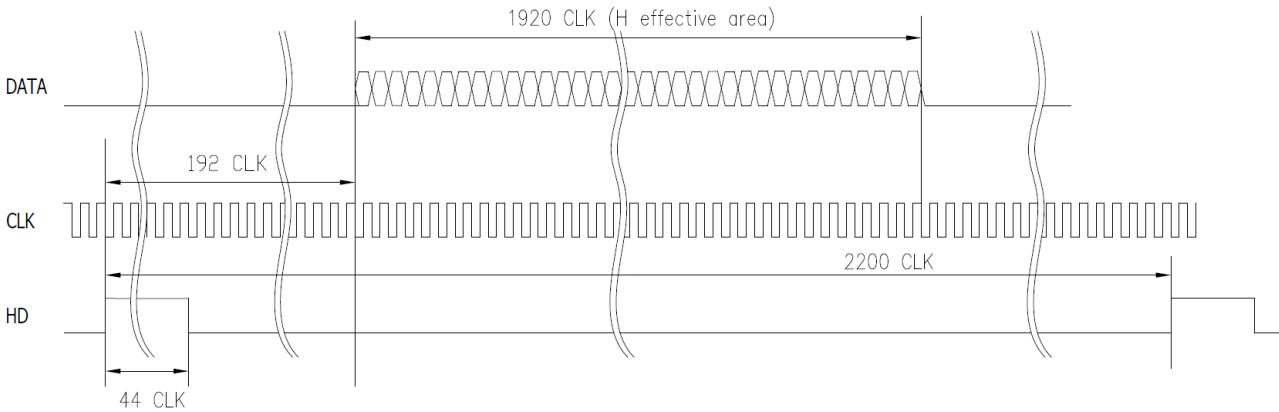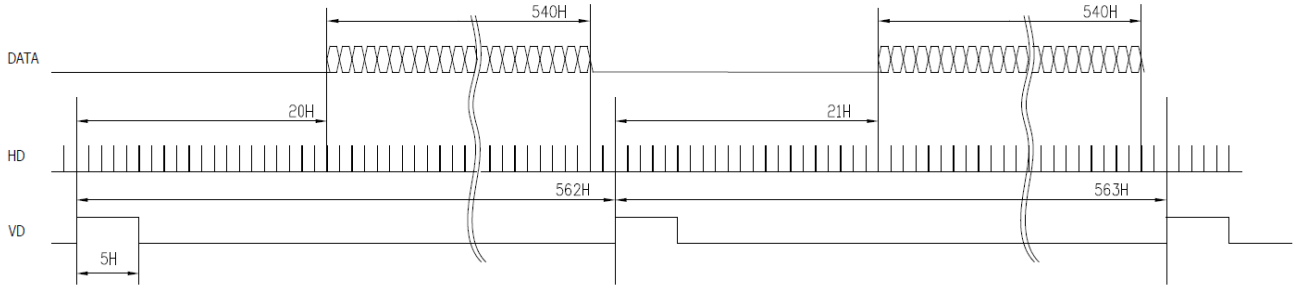







### Output Timing Chart(1920x1080i@50)

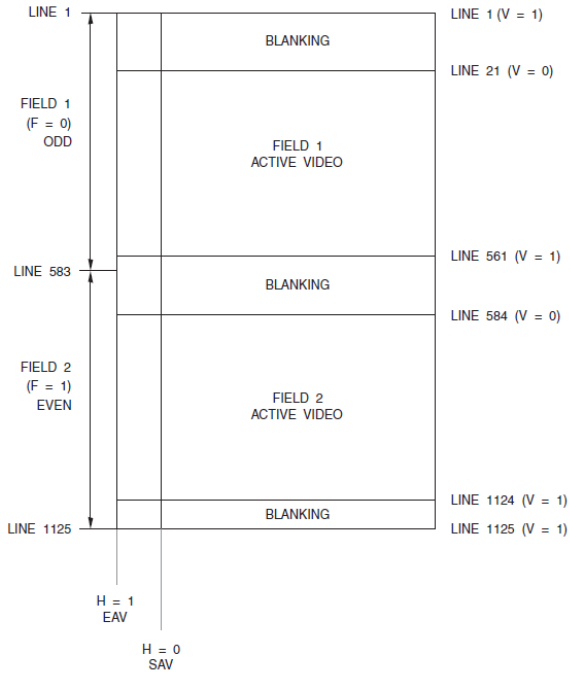


LINE NUMBER	F	V
1-20	0	1
21-560	0	0
561-562	0	1
563-583	1	1
584-1123	1	0
1124-1125	1	1

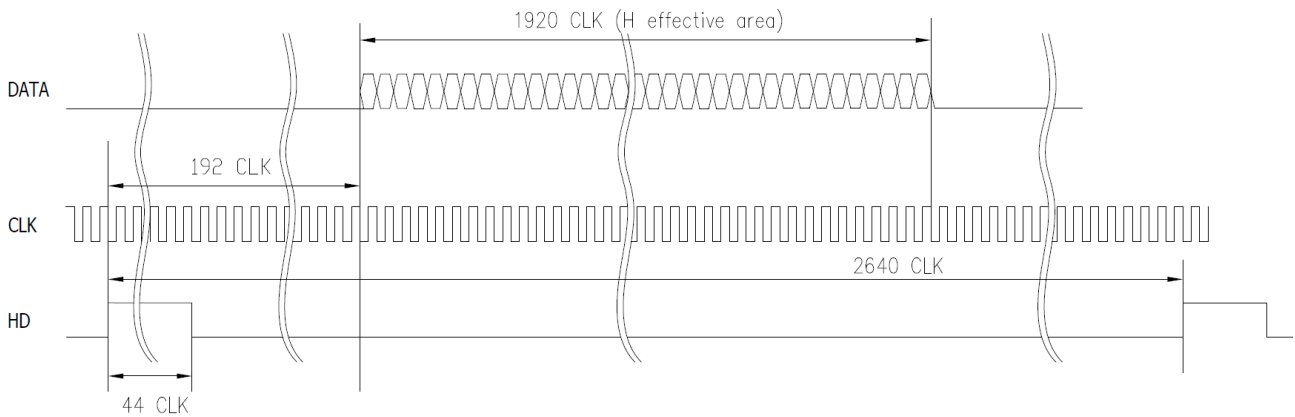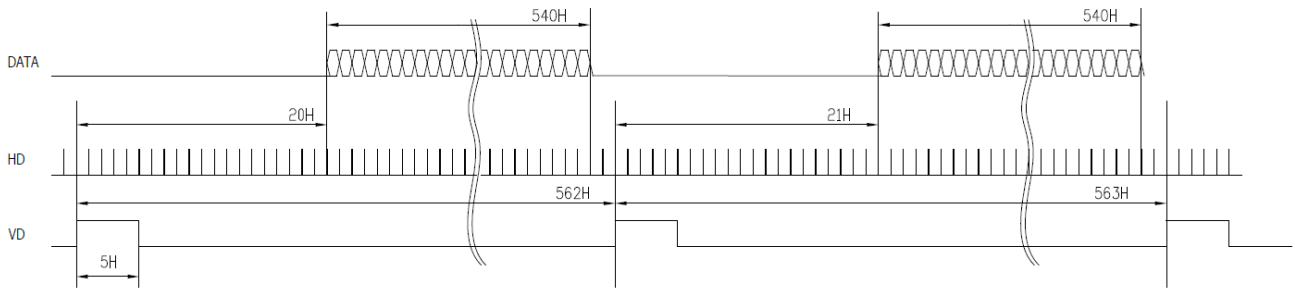




### Output Timing Chart(1280x720p@60/59.94)

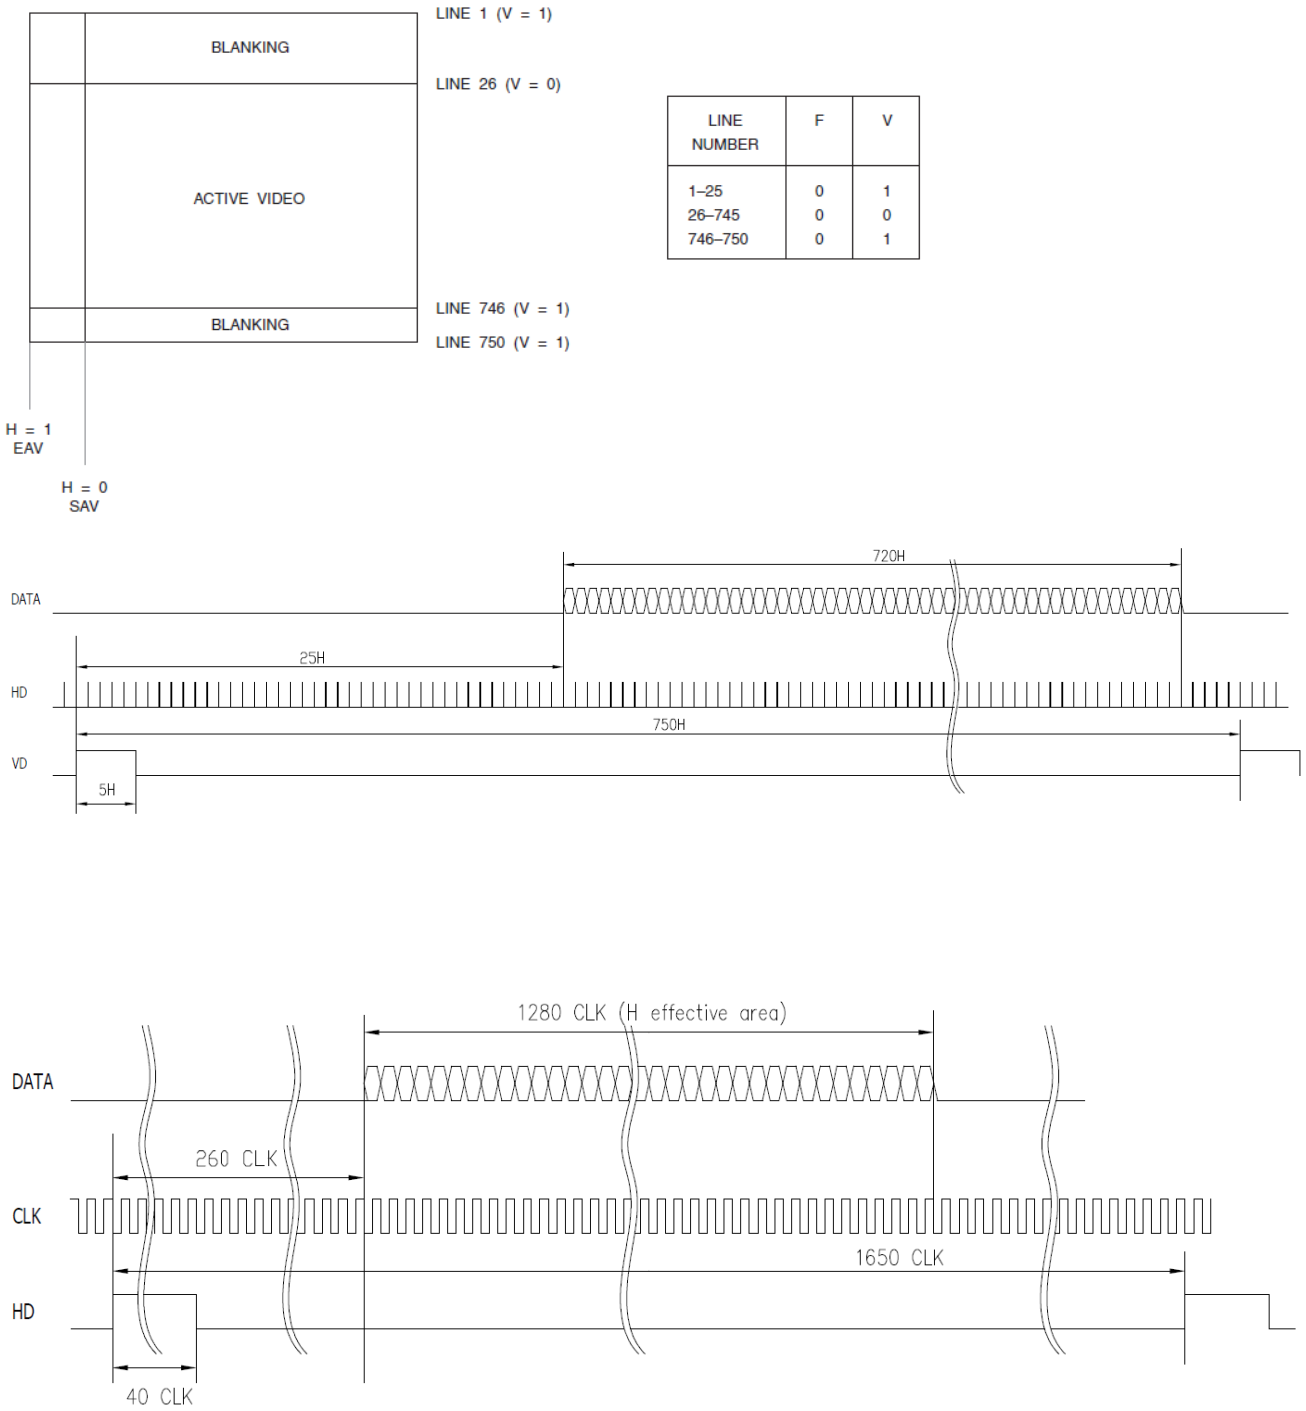




### Output Timing Chart(1280x720p@50)

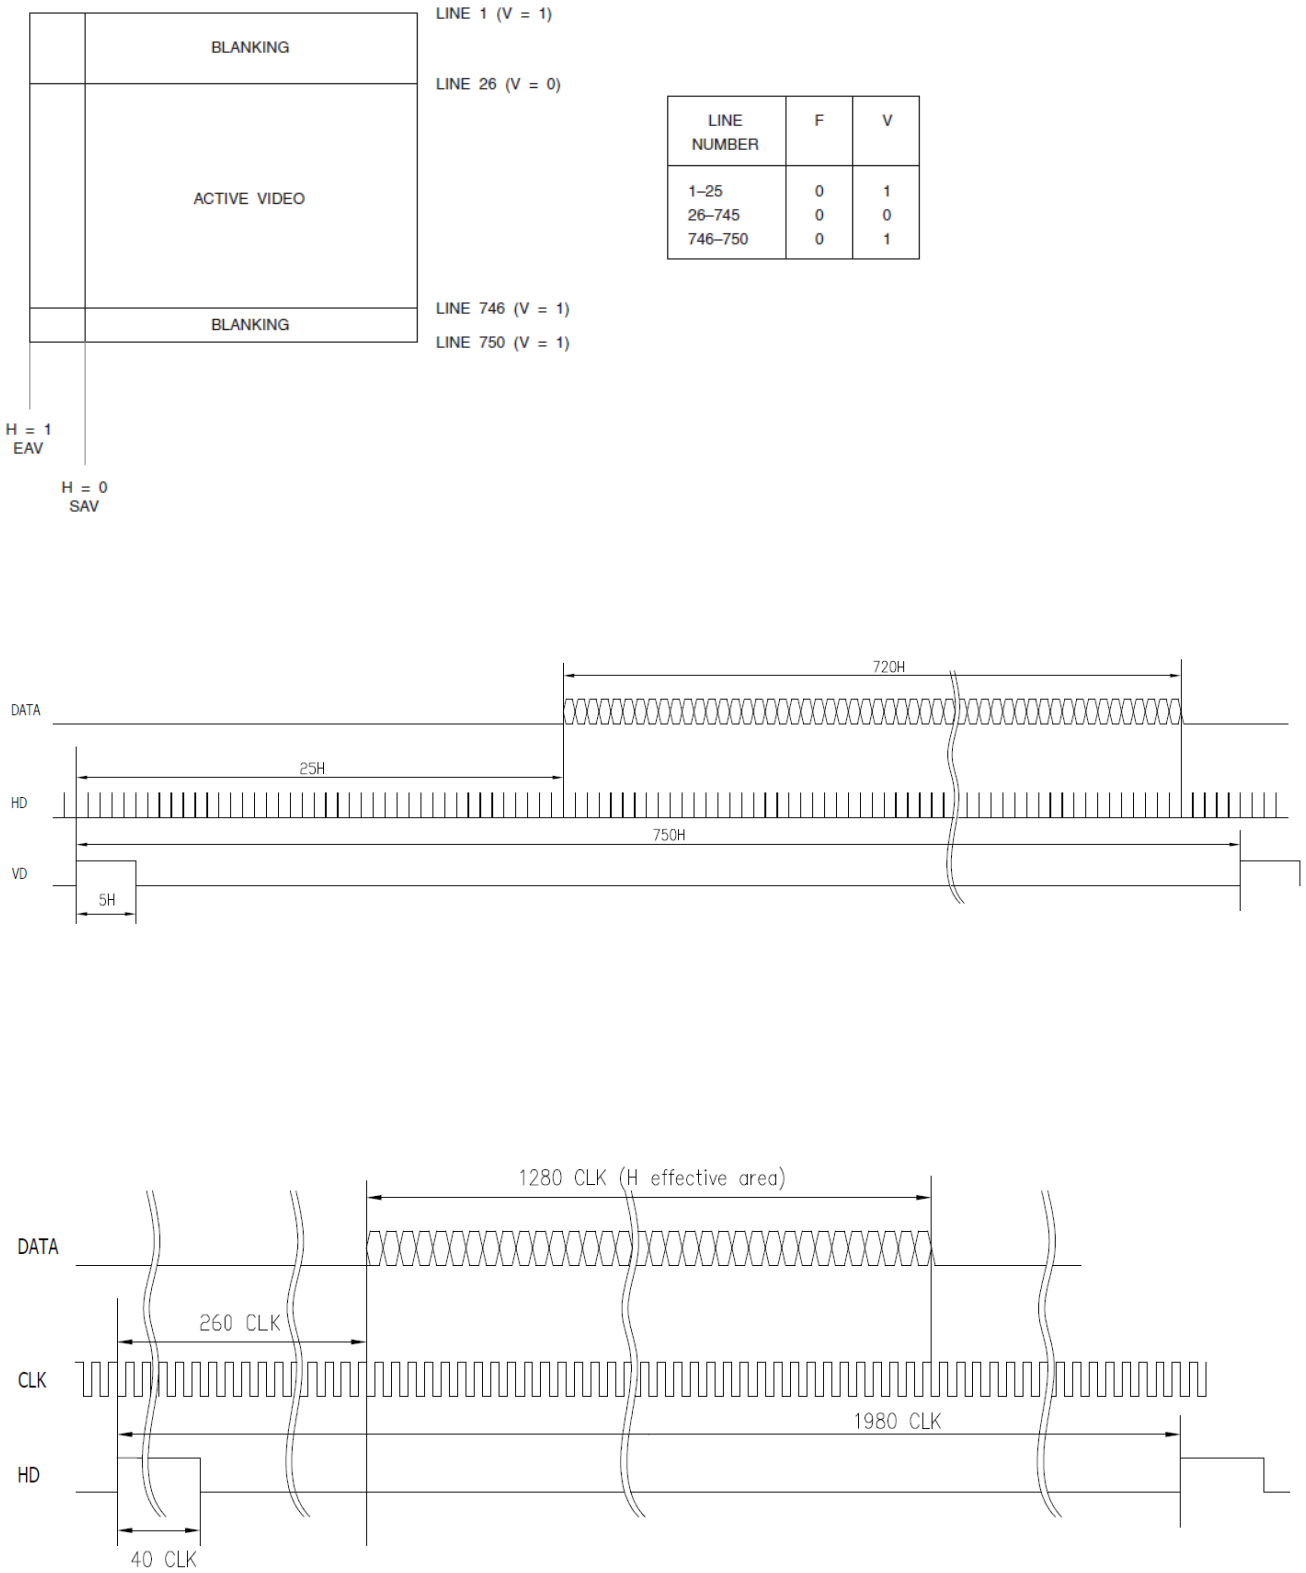




### Output Timing Chart(1280x720p@30/29.97)

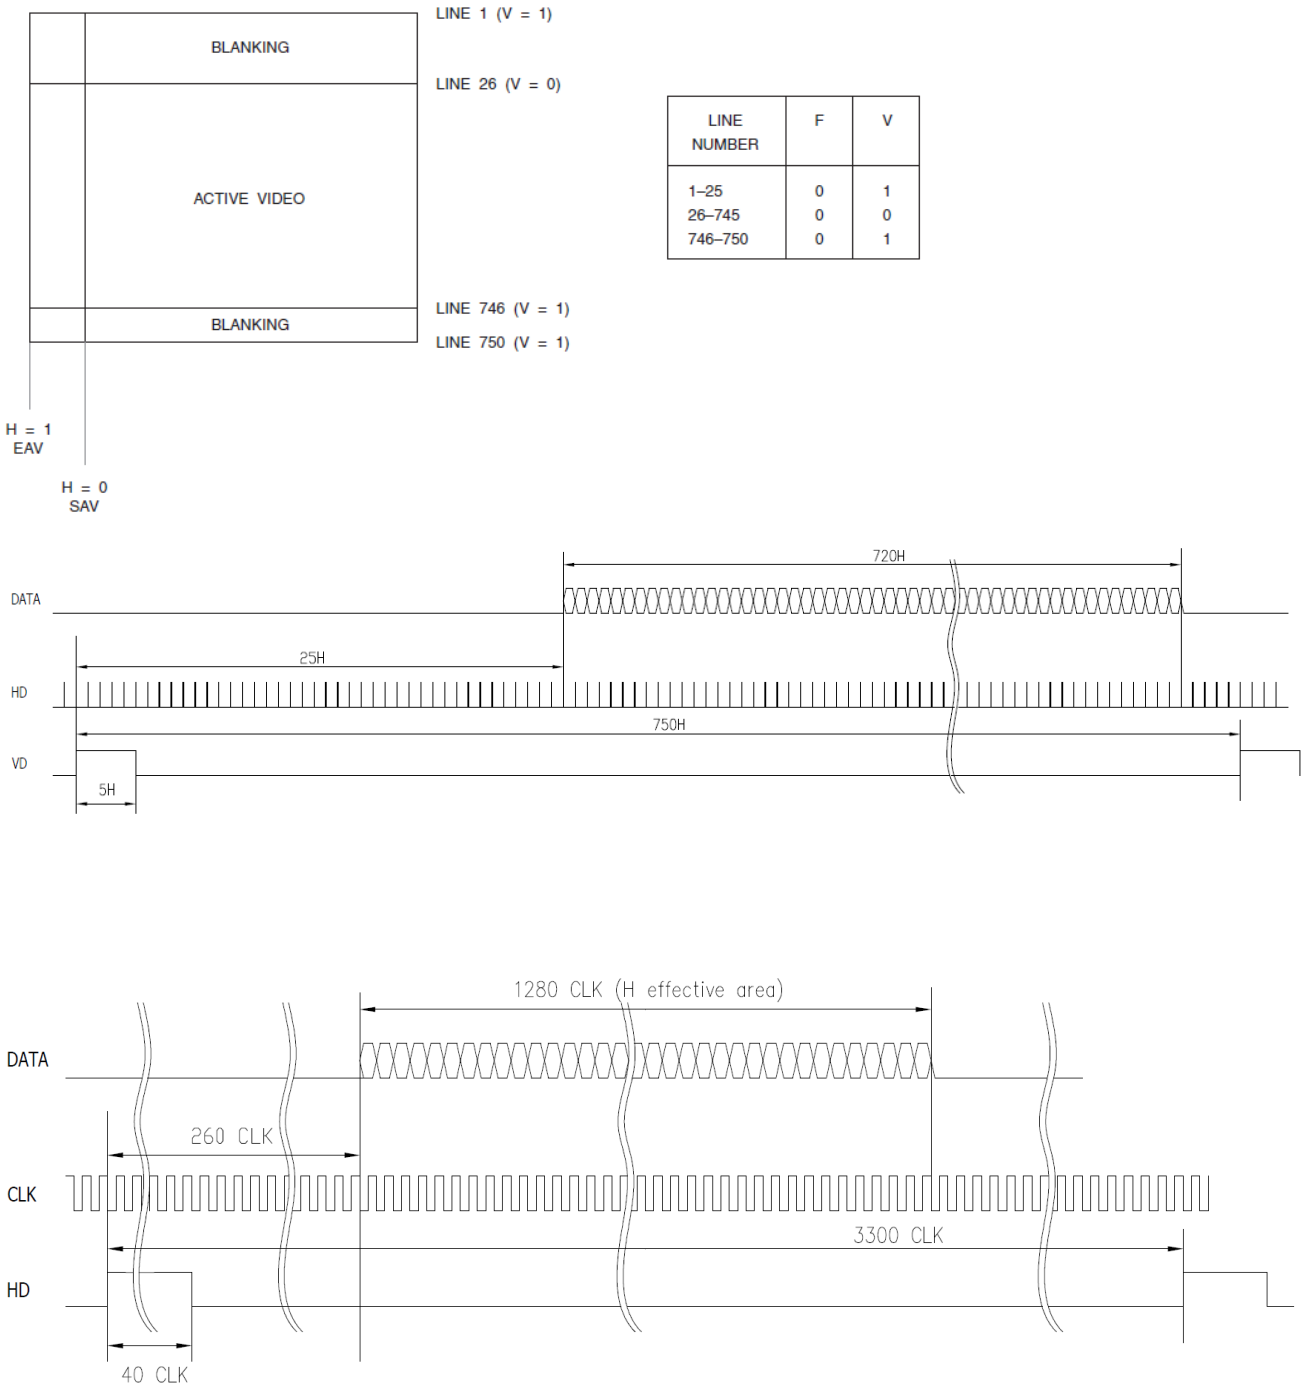




### Output Timing Chart(1280x720p@25)

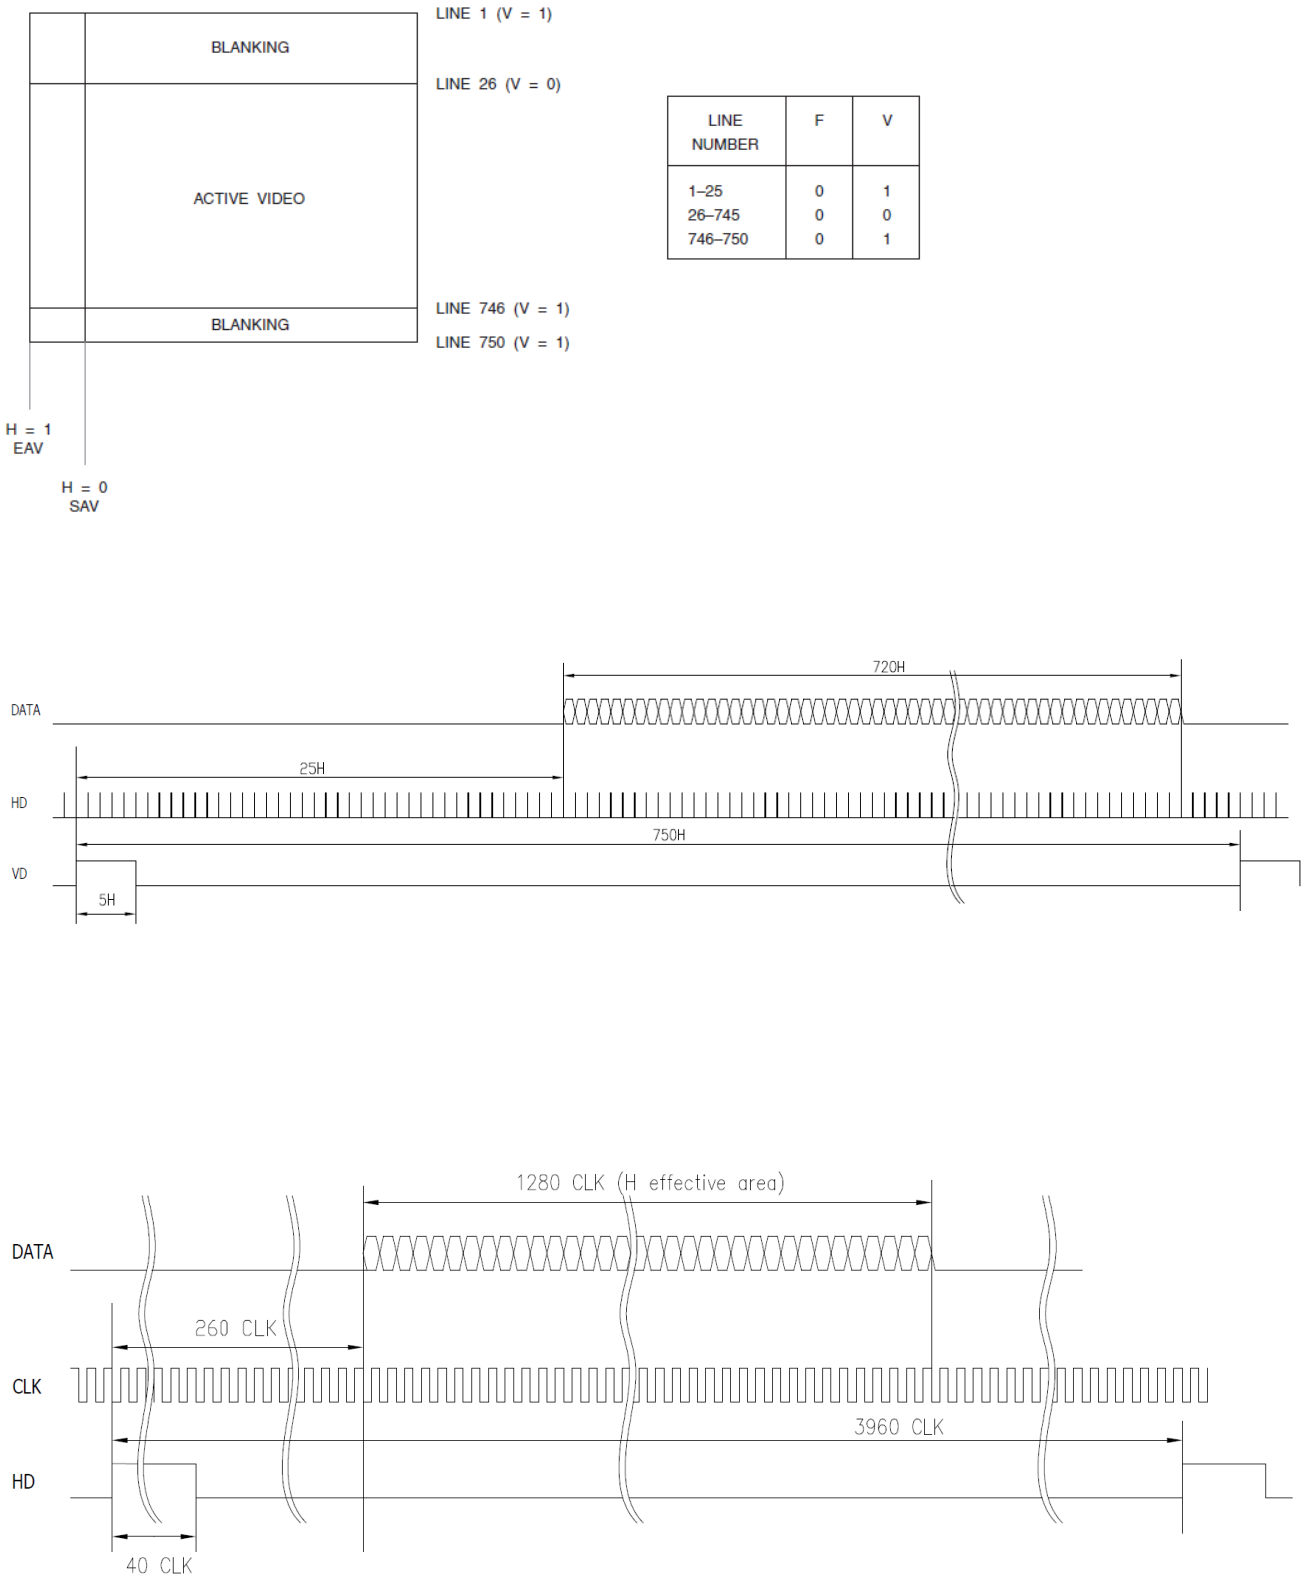



## Video Data Start/Stop Format

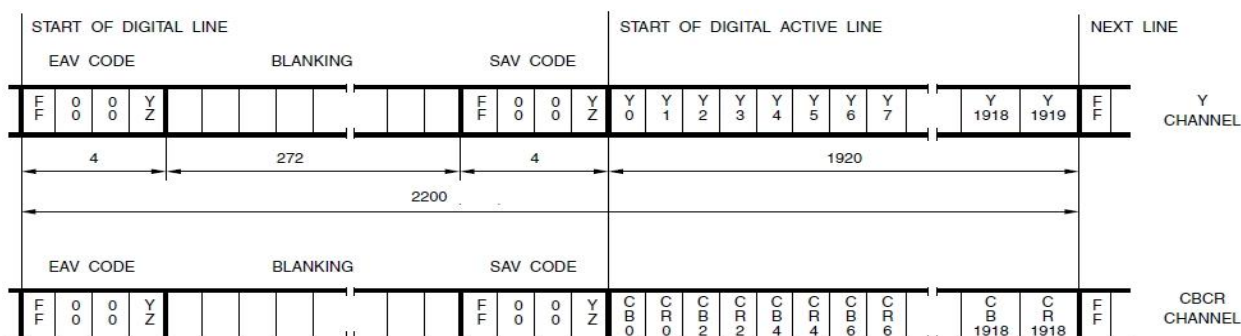

### EAV and SAV CODE

	D7 <sub>(MSB)</sub>	D6	D5	D4	D3	D2	D1	D0 <sub>(LSB)</sub>
Preamble	1	1	1	1	1	1	1	1
	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0
Status word	1	F	V	H	P3	P2	P1	P0

### EAV and SAV Sequence

The EAV and SAV sequences are shown in Table A. The status word is defined as:

F = “0” or “1” (Selectable)

V = “1” during vertical blanking

H = “0” at SAV H = “1” at EAV

P3–P0 = protection bits

$$P3 = V \oplus H$$

$$P2 = F \oplus H$$

$$P1 = F \oplus V$$


$$P0 = F \oplus V \oplus H$$





## 7. Camera Interface

### 7.1. Camera Interface

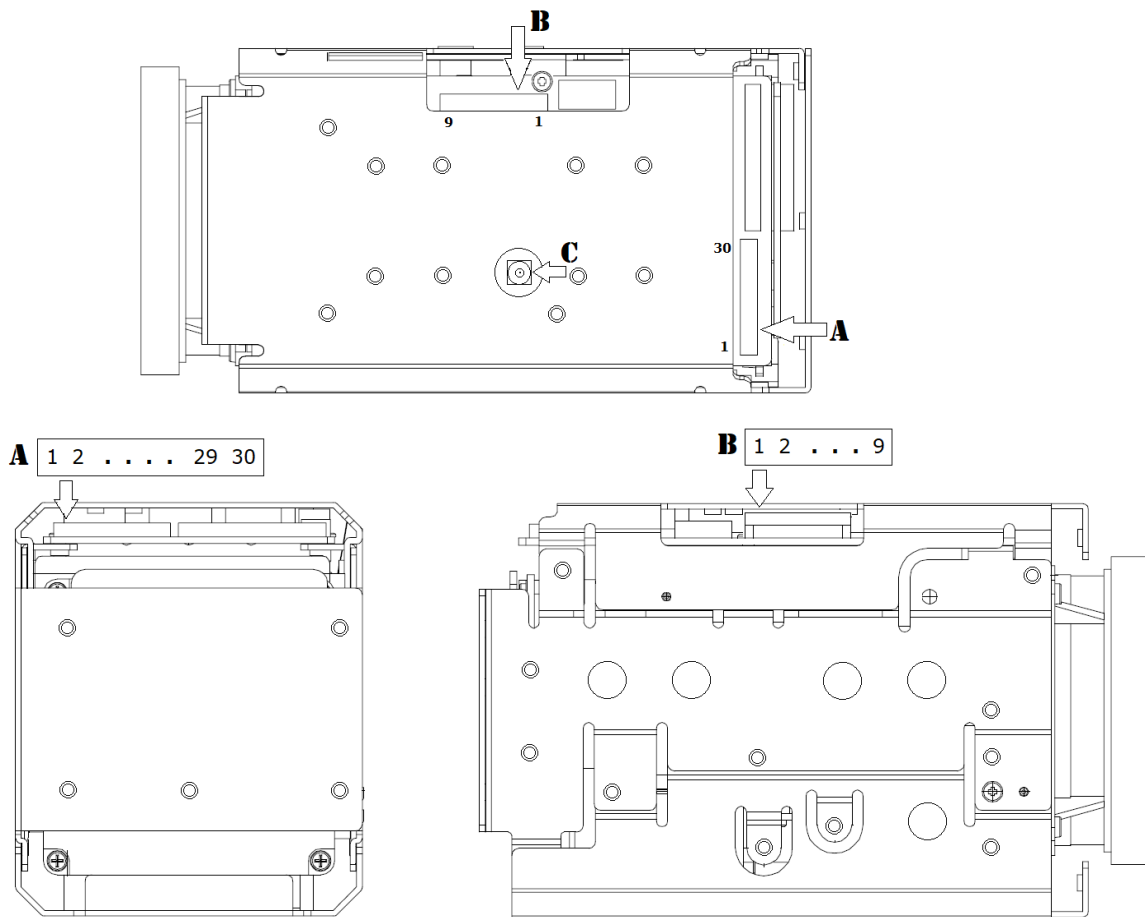


#### B connector:

Connector – KYOCERA 00-6200-509-130-000+ ( 1.0mm pitch 9pin, Bottom Contact )

Pin	Name	Level
1	RXD (UART input)	CMOS 5V (High Min. 2.5V)
2	TXD (UART output)	CMOS 5V (High Min. 4.5V)
3	GND	
4	DC power input	7 ~ 15VDC
5	GND	
6	CVBS Output	1Vp-p
7	GND	
8	ADKey	KEY input(* <b>refer Key circuit</b> )
9	N.C	

1.0mm pitch FFC/FPC Cable (9pin)

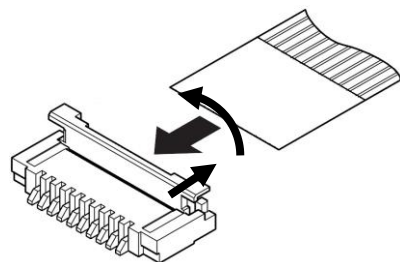

Slide actuator out  
and rotate it up to insert FPC.



**C connector:** HD-SDI video output

Connector – U.FL-R-SMT-1(01)




**A connector :** USL00-30L-C (KEL)

Recommended cable ASSY :

Cables - micro coaxial cable #42AWG

Connectors - USL20-30S (KEL)

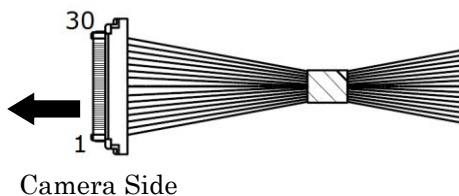


A connector pin assignment (KEL USL00-30L)			
1	TXOUT3+ (LVDS)	16	DC (7~15V)
2	TXOUT3- (LVDS)	17	DC (7~15V)
3	TXCLKOUT+ (LVDS)	18	DC (7~15V)
4	TXCLKOUT- (LVDS)	19	KEY input
5	TXOUT2+ (LVDS)	20	GND
6	TXOUT2- (LVDS)	21	TXOUT7+ (LVDS) for Dual out mode
7	TXOUT1+ (LVDS)	22	TXOUT7- (LVDS) for Dual out mode
8	TXOUT1- (LVDS)	23	TXOUT6+ (LVDS) for Dual out mode
9	TXOUT0+ (LVDS)	24	TXOUT6- (LVDS) for Dual out mode
10	TXOUT0- (LVDS)	25	CVBS output (1Vp-p)
11	GND	26	EXT. Reset :Reset Low(GND), Normal Open(3.3V)
12	TXD (UART output) High Min. 4.5V	27	TXOUT5+ (LVDS) for Dual out mode
13	RXD (UART input) High Min. 2.5V	28	TXOUT5- (LVDS) for Dual out mode
14	DC (7~15V)	29	TXOUT4+ (LVDS) for Dual out mode
15	DC (7~15V)	30	TXOUT4- (LVDS) for Dual out mode






## 7.2. LVDS Interface

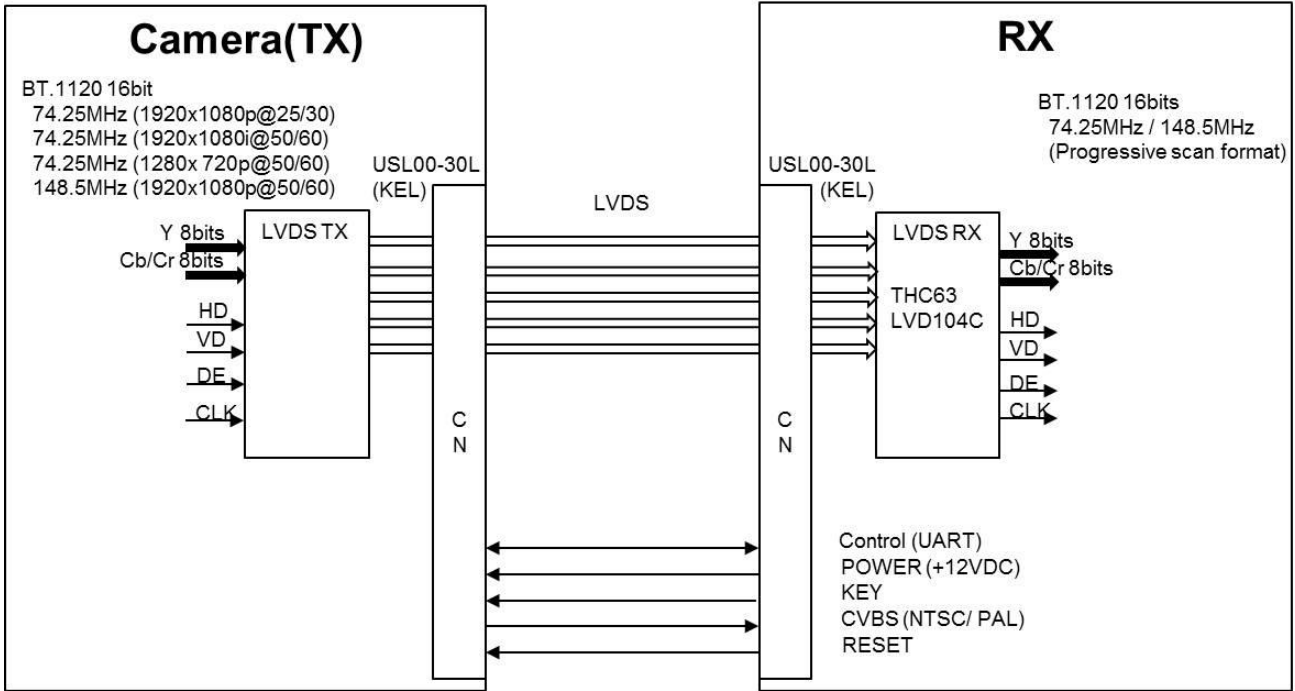

LVDS Single Output only

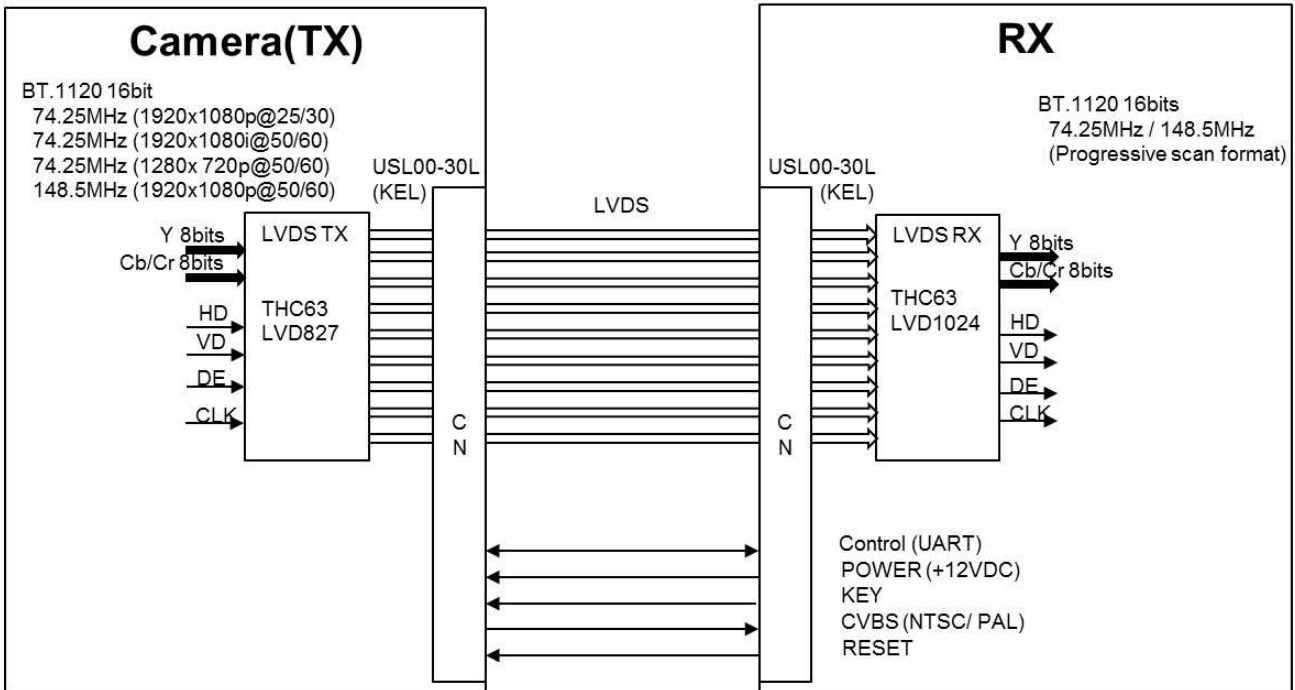


LVDS Single/Dual Output






## LVDS Data Mapping

### Single Mode (16bits)

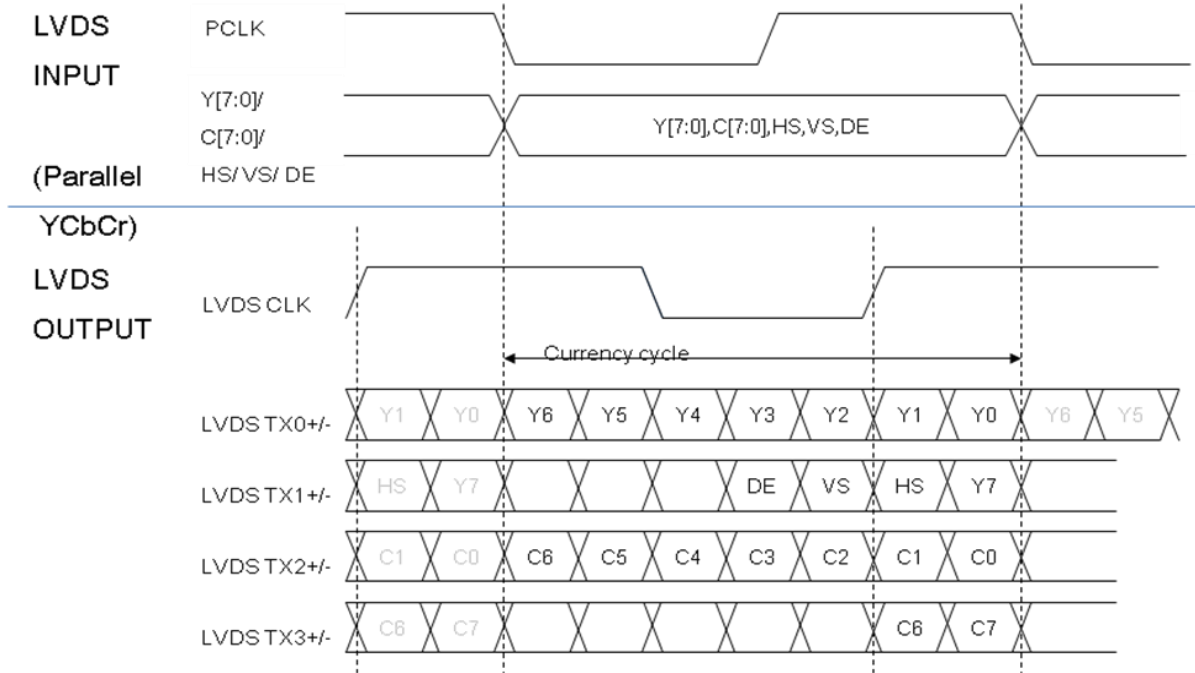


### Dual Mode (16bits)

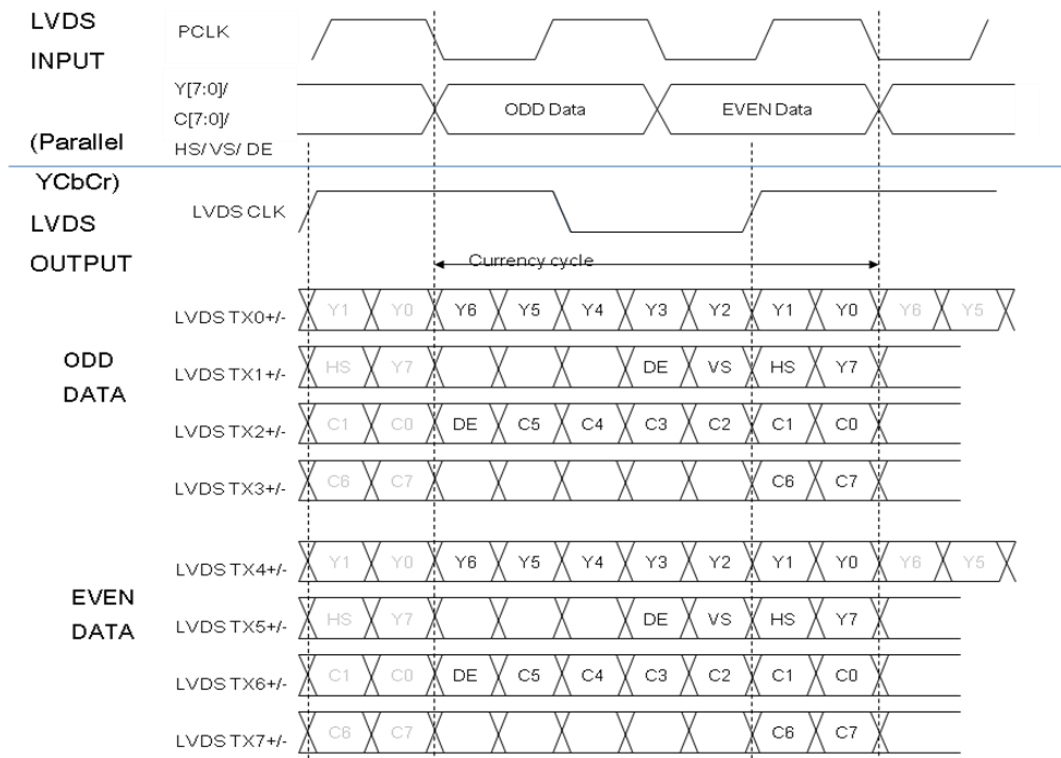




### 7.3. Application of recommended circuit Camera Reception

#### LVDS Rx(THC63LVD104C) circuit (Single Output Only)

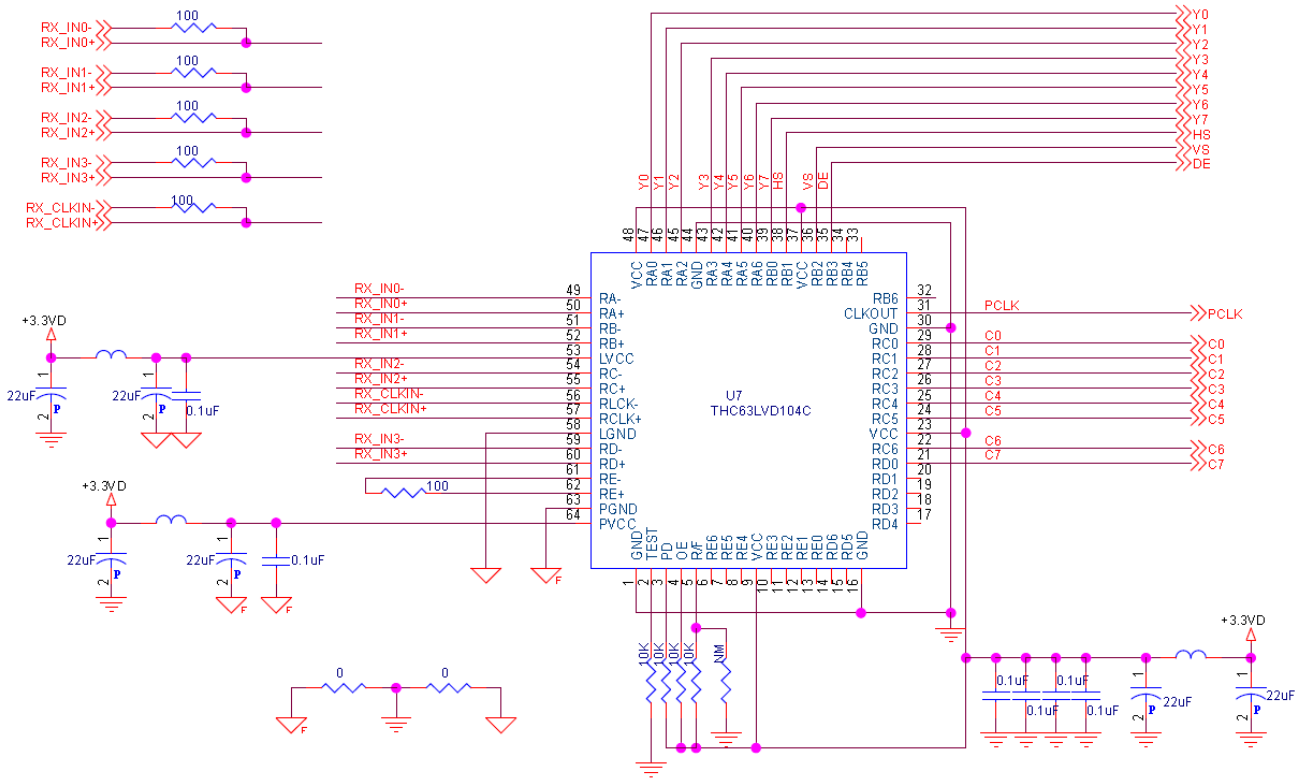




**LVDS Rx(THC63LVD1024) circuit (Single output)**

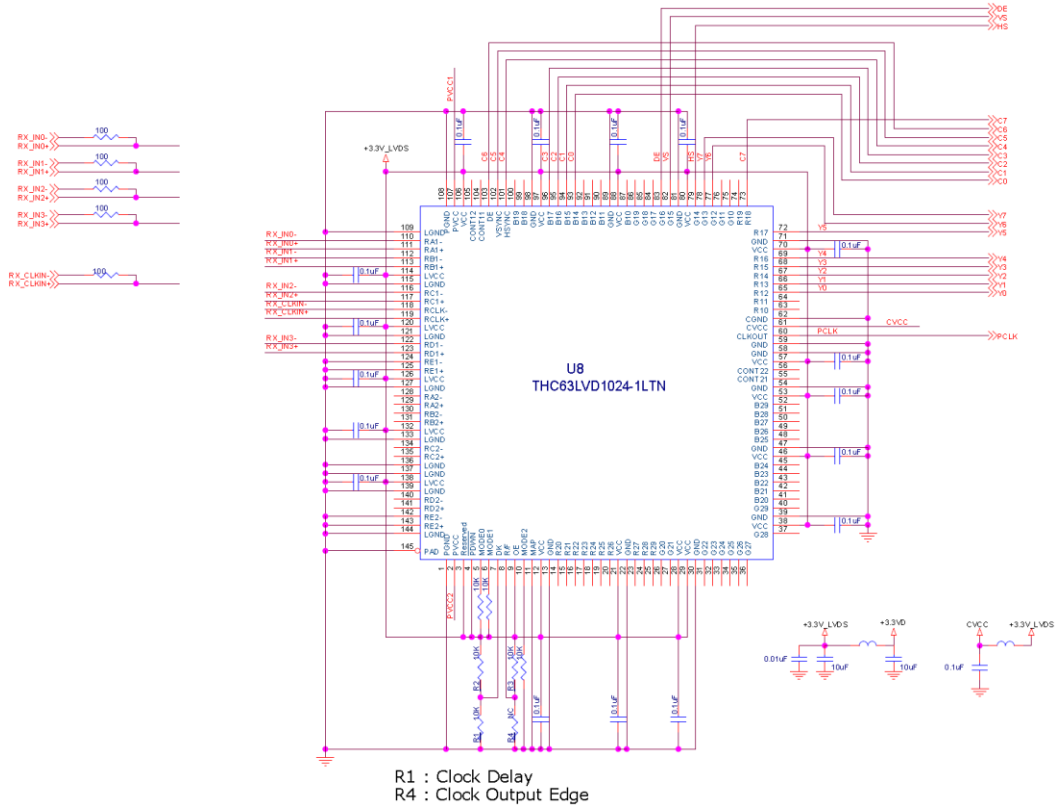


**LVDS Rx(THC63LVD1024) circuit (Dual output)**

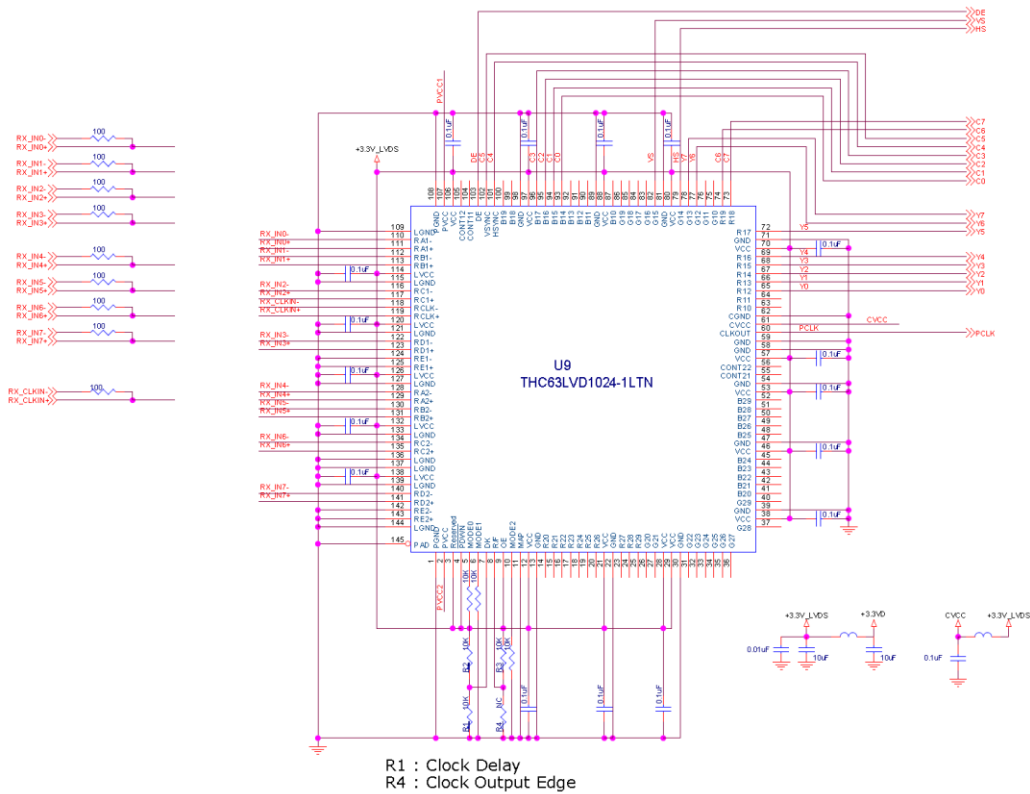




### 7.4. Key Application recommended circuit

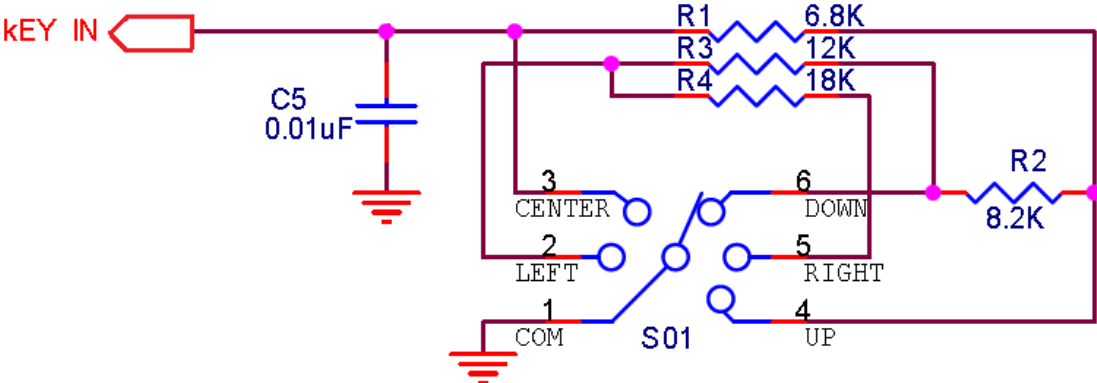




# 8. Dimensions


Front




Right side

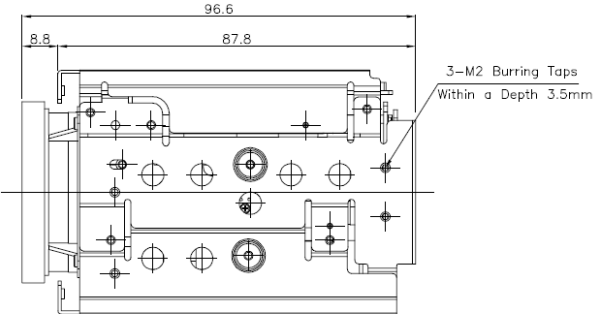


Top

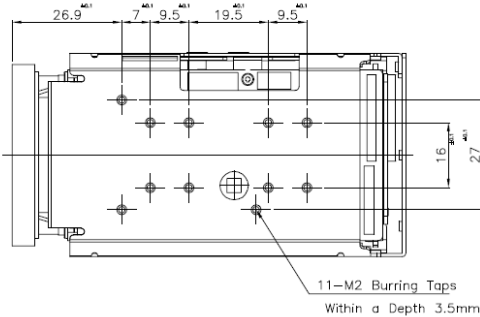


Left side

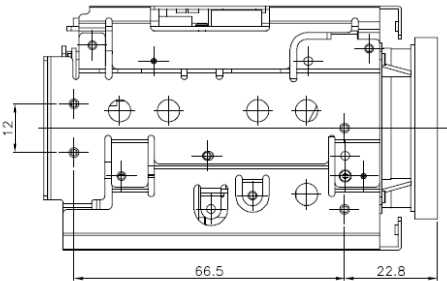

Bottom

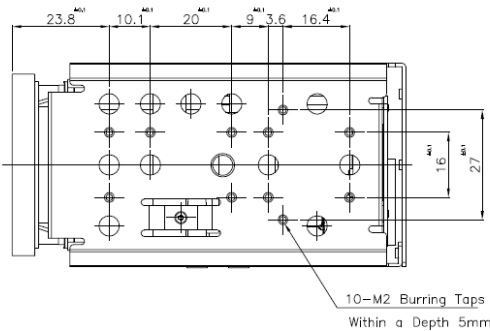

Back





## APPENDIX A

### VISCA Protocol

Specification: 9600/ 19200/ 38400/ 115200bps, 8bit data, 1stop bit, none parity

	Command Packet (3~ 16bytes)	Comments
Inquiry	8X QQ RR ... FF	8X: 0x80+ camera address X = 1 to 7 :camera address QQ: 01-Command/ 09-Inquiry RR: Category 00(Interface) 04(cam1) 06(Pan/Tilt) 07(cam2) FF: Terminator (0xff)

Reply Packet			
Completion	ACK	X0 4Y FF	X = 9 to F: Camera address + 8
message	Completion (commands)	X0 5Y FF	Y: socket number
	Completion (Inquiries)	X0 5Y ... FF	

Reply Packet			
Error message	Error	X0 6Y 01 FF	Message length error (>14 bytes)
		X0 6Y 02 FF	Syntax Error
		X0 6Y 03 FF	Command buffer full
		X0 6Y 04 FF	Command cancelled
		X0 6Y 05 FF	No socket (to be cancelled)
		X0 6Y 41 FF	Command not executable
			X = 9 to F: Camera address + 8, Y = socket number

Command execution cancel	cancel	8X 2Y FF	X = 1 to 7: Camera address, Y = socket number
--------------------------	--------	----------	--


Network Change Address	Address Network Change	88 30 01 FF . X0 38 FF	Always broadcasted X = 9 to F: Camera address + 8
------------------------	------------------------	---------------------------	--






	Command Packet	Reply Packet
IF_Clear	8X 01 00 01 FF	X0 50 FF
IF_Clear (broadcast)	88 01 00 01 FF	88 01 00 01 FF

	Inquiry Packet	Reply Packet	
CAM_VersionInq	8X 09 00 02 FF	Y0 50 GG GG HH HH JJ JJ KK FF	GGGG = 002B: Vender ID HHHH = Model ID <b>3020: x30 FullHD module</b> JJJJ = ROM revision KK = Maximum socket # (02) X = 1 to 7: camera address Y = 9 to F: camera address + 8



Command example

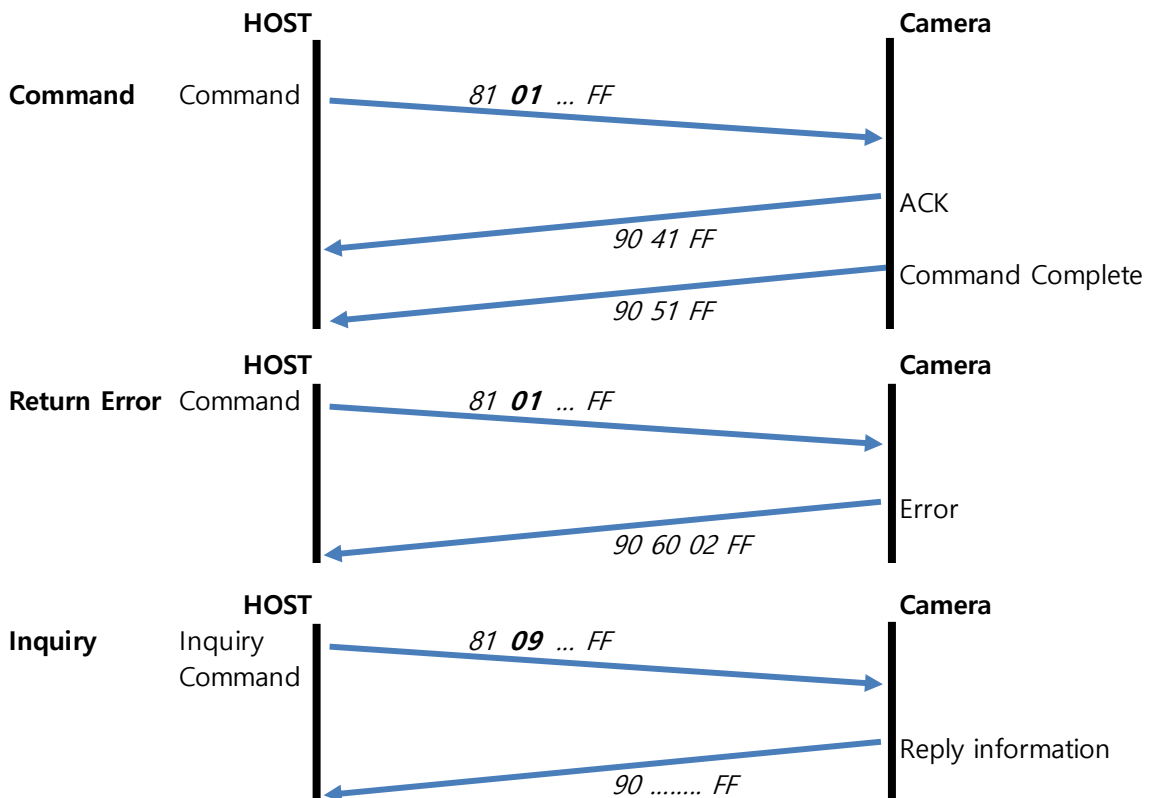





## Command Set

Command Set	Command	Packet	Comments
AddressSet	Broadcast	88 30 01 FF	Address setting
IF_Clear	Broadcast	88 01 00 01 FF	I/F Clear
CAM_Power CAM_Zoom	On	8x 01 04 00 02 FF	Power ON/OFF (Always On)
	Stop	8x 01 04 07 00 FF	
	Tele (Standard)	8x 01 04 07 02 FF	
	Wide (Standard)	8x 01 04 07 03 FF	
	Tele (Variable)	8x 01 04 07 2p FF	p=0 (Low) to 7 (High)
	Wide (Variable)	8x 01 04 07 3p FF	
	Direct (AF Zoom)	8x 01 04 47 0p 0q 0r 0s FF	pqrs: Zoom Position (refer <a href="#">Table</a> ) Auto Focusing during Zooming
Direct (AF Zoom) variable	8x 01 04 47 0n 0p 0q 0r 0s FF	n: zoom speed 0(low) to 7(high) pqrs: Zoom Position (refer <a href="#">Table</a> ) Auto Focusing during Zooming	
CAM_DZoom	On	8x 01 04 06 02 FF	Digital zoom ON/OFF
	Off	8x 01 04 06 03 FF	
	Combine Mode	8x 01 04 36 00 FF	Optical/Digital Zoom Combined
	Separate Mode	8x 01 04 36 01 FF	Optical/Digital Zoom Separate
	Stop	8x 01 04 06 00 FF	
	Tele (Variable)	8x 01 04 06 2p FF	p=0 (Low) to 7 (High)
	Wide (Variable)	8x 01 04 06 3p FF	* Enabled during Separate Mode
	x1/Max	8x 01 04 06 10 FF	x1/MAX Magnification Switchover * Enabled during Separate Mode
Direct	8x 01 04 46 00 00 0p 0q FF	pq: D-Zoom Position (0-0xEB) refer <a href="#">Table</a> * Enabled during Separate Mode	
CAM_Focus	Stop	8x 01 04 08 00 FF	
	Far (Standard)	8x 01 04 08 02 FF	
	Near (Standard)	8x 01 04 08 03 FF	
	Far (Variable)	8x 01 04 08 2p FF	p=0 (Low) to 7 (High)
	Near (Variable)	8x 01 04 08 3p FF	
	Direct	8x 01 04 48 0p 0q 0r 0s FF	pqrs: Focus Position (0x1000 - 0xC000)
	Auto Focus	8x 01 04 38 02 FF	AF ON/OFF
	Manual Focus	8x 01 04 38 03 FF	
	Auto/Manual	8x 01 04 38 10 FF	
	One Push Trigger	8x 01 04 18 01 FF	One Push AF Trigger
Near Limit	8x 01 04 28 0p 0q 0r 0s FF	pqrs: Focus Near Limit Position (refer <a href="#">Table</a> )	



**Command Set**

Command Set	Command	Packet	Comments
AF Sensitivity	Normal	8x 01 04 58 02 FF	AF Sensitivity High/Low
	Low	8x 01 04 58 03 FF	
CAM_AFMode	Normal AF	8x 01 04 57 00 FF	AF Movement Mode  pq: Movement Time, rs: Interval
	Interval AF	8x 01 04 57 01 FF	
	Zoom Trigger AF	8x 01 04 57 02 FF	
	Active/Interval Time	8x 01 04 27 0p 0q 0r 0s FF	
CAM_SpotFocus	On	8x 01 05 08 02 FF	Starting point(X1, Y1), End point(X2, Y2) p:X1, q:Y1, r:X2, s:Y2 (0 to 0Fh) X2-X1: minimum 3 Y2-Y1: minimum 4
	Off	8x 01 05 08 03 FF	
	Set Parameter	8x 01 05 69 00 0p 0q 0r 0s FF	
	Display	8x 01 05 15 02 FF	
CAM_ZoomFocus	Direct	8x 01 04 47 0p 0q 0r 0s 0t 0u 0v 0w FF	pqrs: Zoom Position (refer <b>Table</b> ) tuvw: Focus Position
CAM_ZoomFocus variable	Direct	8x 01 04 47 0n 0p 0q 0r 0s 0t 0u 0v 0w FF	n: zoom speed 0(low) to 7(high) pqrs: Zoom Position (refer <b>Table</b> ) tuvw: Focus Position
CAM_Initialize	Lens	8x 01 04 19 01 FF	Lens Initialization Start
	Camera	8x 01 04 19 03 FF	Camera reset
CAM_WB	Auto	8x 01 04 35 00 FF	Normal Auto
	Indoor	8x 01 04 35 01 FF	Indoor mode
	Outdoor	8x 01 04 35 02 FF	Outdoor mode
	One Push WB	8x 01 04 35 03 FF	One Push WB mode
	ATW	8x 01 04 35 04 FF	Auto Tracing White Balance
	Manual	8x 01 04 35 05 FF	Manual Control mode
	One Push Trigger	8x 01 04 10 05 FF	One Push WB Trigger
CAM_SpotAWB	On	8x 01 05 09 02 FF	Spot AWB On
	Off	8x 01 05 09 03 FF	Spot AWB Off
	Set Parameter	8x 01 05 6B 00 0p 0q 0r 0s FF	"Starting point(X1, Y1), End point(X2, Y2) p:X1, q:Y1, r:X2, s:Y2 (0 to 0Fh) X2-X1: minimum 3 Y2-Y1: minimum 4"
	Display On	8x 01 05 17 0p FF	p: detection frame display 2-On 3-Off





## Command Set

Command Set	Command	Packet	Comments
CAM_RGain	Reset	8x 01 04 03 00 FF	Manual Control of R Gain
	Up	8x 01 04 03 02 FF	
	Down	8x 01 04 03 03 FF	
	Direct	8x 01 04 43 00 00 0p 0q FF	pq: R Gain (0 to 0xFF)
CAM_BGain	Reset	8x 01 04 04 00 FF	Manual Control of B Gain
	Up	8x 01 04 04 02 FF	
	Down	8x 01 04 04 03 FF	
	Direct	8x 01 04 44 00 00 0p 0q FF	pq: B Gain (0 to 0xFF)
CAM_AE	Full Auto	8x 01 04 39 00 FF	Automatic Exposure mode
	Manual	8x 01 04 39 03 FF	Manual Control mode
	Shutter Priority	8x 01 04 39 0A FF	Shutter Priority Automatic Exposure mode
	Iris Priority	8x 01 04 39 0B FF	Iris Priority Automatic Exposure mode
	Bright	8x 01 04 39 0D FF	Bright Mode (Manual control)
CAM_SlowShutter	Auto	8x 01 04 5A 02 FF	Auto Slow Shutter ON/OFF
	Manual	8x 01 04 5A 03 FF	
CAM_Shutter	Reset	8x 01 04 0A 00 FF	Shutter Setting
	Up	8x 01 04 0A 02 FF	
	Down	8x 01 04 0A 03 FF	
	Direct	8x 01 04 4A 00 00 0p 0q FF	pq: Shutter Position (refer <a href="#">Table</a> )
CAM_MinShutter	On	8x 01 04 12 02 FF	
	Off	8x 01 04 12 03 FF	
	Limit	8x 01 13 00 00 0p 0q FF	pq: Minimum Shutter Position (05h to 14h) (refer <a href="#">Table</a> )
CAM_Iris	Reset	8x 01 04 0B 00 FF	Iris Setting
	Up	8x 01 04 0B 02 FF	
	Down	8x 01 04 0B 03 FF	
	Direct	8x 01 04 4B 00 00 0p 0q FF	pq: Iris Position (0 to 0x11) (refer <a href="#">Table</a> )
CAM_Gain	Reset	8x 01 04 0C 00 FF	Gain Setting
	Up	8x 01 04 0C 02 FF	
	Down	8x 01 04 0C 03 FF	
	Direct	8x 01 04 4C 00 00 0p 0q FF	pq: Gain Position (1 to 0x17) (refer <a href="#">Table</a> )
	Gain Limit	8x 01 04 2C 0p FF	pp: Gain Position (1 to 0x17) (refer <a href="#">Table</a> )
CAM_Bright	Reset	8x 01 04 0D 00 FF	Bright Setting
	Up	8x 01 04 0D 02 FF	
	Down	8x 01 04 0D 03 FF	
	Direct	8x 01 04 4D 00 00 0p 0q FF	pq: Bright Position (refer <a href="#">Table</a> )



## Command Set

Command Set	Command	Packet	Comments
CAM_ExpComp	On	8x 01 04 3E 02 FF	Exposure Compensation ON/OFF
	Off	8x 01 04 3E 03 FF	
	Reset	8x 01 04 0E 00 FF	Exposure Compensation Amount Setting
	Up	8x 01 04 0E 02 FF	
	Down	8x 01 04 0E 03 FF	
	Direct	8x 01 04 4E 00 00 0p 0q FF	pq: ExpComp Position (0 to 0x0E) (refer <a href="#">Table</a> )
CAM_BackLight	On	8x 01 04 33 02 FF	Back Light Compensation ON/OFF
	Off	8x 01 04 33 03 FF	
CAM_SpotAE	On	8x 01 04 59 02 FF	Spot Automatic Exposure Setting
	Off	8x 01 04 59 03 FF	
	Set Parameter	8x 01 05 6A 00 0p 0q 0r 0s FF	"Starting point(X1, Y1), End point(X2, Y2) p:X1, q:Y1, r:X2, s:Y2" (0 to 0Fh)
	Display	8x 01 05 16 0p FF	p: detection frame display 2-On 3-Off
CAM_AEResponse	Direct	8x 01 04 5D pp FF	pp: Automatic Exposure Response Setting (01 to 30)
CAM_WD	On	8x 01 04 3D 02 FF	Wide-D ON/OFF
	Off	8x 01 04 3D 03 FF	
	VE On	8x 01 04 3d 06 FF	VE On
	Set Parameter	8x 01 04 2D 00 0q 0r 0s 00 00 00 00 FF	q: Display brightness level(0:Dark to 6:Bright) r: Brightness compensation selection (0: Very dark 1: Dark 2: Standard 3: Bright) s: Compensation level (0: L 1: M 2: H)
CAM_Aperture (Sharpness)	Reset	8x 01 04 02 00 FF	Aperture(Sharpness-edge enhancement) Control
	Up	8x 01 04 02 02 FF	
	Down	8x 01 04 02 03 FF	
	Direct	8x 01 04 42 00 00 0p 0q FF	pq: Aperture(Sharpness) Gain (0 to 0x14)
CAM_HR	On	8x 01 04 52 02 FF	High-Resolution Mode ON/OFF
	Off	8x 01 04 52 03 FF	
CAM_NR	Noise Reduction	8x 01 04 53 0p FF	p: NR Setting (0:OFF 1:Low ~ 5:High)
	2D/3D NR	8x 01 05 53 0p 0q FF	p: 2DNR level (0: OFF, 1 to 5: level 1 to 5)
	Independent setting		q: 3DNR level (0: OFF, 1 to 5: level 1 to 5)
CAM_Gamma		8x 01 04 5B 0p FF	p: Gamma setting (0~9) 0: Standard 1: Straight
	Offset	8x 01 04 1E 00 00 00 0s 0t 0u FF	s: Polarity offset (0 is plus, 1 is minus) tu: Offset s=0 (00h to 40h) Offset s=1 (00h to 40h)



## Command Set

Command Set	Command	Packet	Comments
CAM_HighSensitivity	On	8x 01 04 5E 02 FF	High Sensitivity mode ON/OFF
	Off	8x 01 04 5E 03 FF	
CAM_LR_Reverse	On	8x 01 04 61 02 FF	Mirror Image ON/OFF
	Off	8x 01 04 61 03 FF	
CAM_Freeze	On	8x 01 04 62 02 FF	Still Image ON/OFF
	Off	8x 01 04 62 03 FF	
CAM_PictureEffect	Off	8x 01 04 63 00 FF	Picture Effect Setting
	Neg.Art	8x 01 04 63 02 FF	
	B&W	8x 01 04 63 04 FF	
	Reddish	8x 01 04 63 1p FF	p : 0(Reddish1) ~ 3(Reddish4)
	Bluish	8x 01 04 63 2p FF	p : 0(Bluish1) ~ 3(Bluish4)
	Greenish	8x 01 04 63 3p FF	p : 0(Greenish1) ~ 3(Greenish4)
CAM_Defog	On	8x 01 04 37 02 0p FF	p:Defog level (0:auto, 1:low, 2:mid, 3:high)
	Off	8x 01 04 37 03 00 FF	
CAM_PictureFlip	On	8x 01 04 66 02 FF	Picture flip ON/OFF
	Off	8x 01 04 66 03 FF	
CAM_ICR	On	8x 01 04 01 02 FF	ICR Mode On (BW)
	On (Color)	8x 01 04 01 04 FF	ICR Mode On (Color)
	Off	8x 01 04 01 03 FF	ICR Mode Off
CAM_AutoICR	On	8x 01 04 51 02 FF	Auto dark-field mode On/Off
	On (Color)	8x 01 04 51 04 FF	Auto ICR Mode On (Color)
	Off	8x 01 04 51 03 FF	
	Threshold	8x 01 04 21 00 00 0p 0q FF	pq: ICR On/Off Threshold Level(0 to 0x14)
CAM_AutoICR AlarmReply	On	8x 01 04 31 02 FF	Auto ICR switching Alarm ON/OFF
	Off	8x 01 04 31 03 FF	
	(Reply)	y0 07 04 31 02 FF	ICR OFF -> ON
		y0 07 04 31 03 FF	ICR ON -> OFF
CAM_Stabilizer	On	8x 01 04 34 02 FF	Stabilizer ON/OFF/HOLD
	Off	8x 01 04 34 03 FF	
	Hold	8x 01 04 34 00 FF	
CAM_Memory (Preset pos)	Reset	8x 01 04 3F 00 0p FF	p: Memory Number (=0 to 6)
	Set	8x 01 04 3F 01 0p FF	
	Recall	8x 01 04 3F 02 0p FF	



**Command Set**

Command Set	Command	Packet	Comments
CAM_CUSTOM	Reset	8x 01 04 3F 00 7F FF	Starts up in this mode when the power is turned on.
	Set	8x 01 04 3F 01 7F FF	
	Recall	8x 01 04 3F 02 7F FF	
CAM_MemSave	Write	8x 01 04 23 0X 0p 0q 0r 0s FF	X: 00 to 07 (Address), total 16 byte pqrs: 0x0000 to 0xFFFF (Data)
CAM_Display	On	8x 01 04 15 02 FF	Display ON/OFF
	Off	8x 01 04 15 03 FF	
	On/Off	8x 01 04 15 10 FF	
DisplayZoomMag	On	8x 01 06 16 02 FF	Zoom mag display On/Off
	Off	8x 01 06 16 03 FF	
CAM_Mute	On	8x 01 04 75 02 FF	Muting ON/OFF
	Off	8x 01 04 75 03 FF	
	On/Off	8x 01 04 75 10 FF	
CAM_IDWrite		8x 01 04 22 0p 0q 0r 0s FF	pqrs: Camera ID (=0000 to FFFF)
CAM_HLC		8x 01 04 14 0p 0q FF	p: HLC level (0: OFF, 1: ON) q: HLC mask level (0 to F: from low to high level)
		8x 01 06 06 pp FF	pp: 2-ON 3-OFF 0-BACK 11-UP 12-DOWN 14-LEFT 18-RIGHT
CAM_Flickerless	Auto	8x 01 7E 04 53 00 FF	Flickerless On/Off
	ON	8x 01 7E 04 53 02 FF	
	OFF	8x 01 7E 04 53 03 FF	
CAM_Continuous ZoomPosReply	On	8x 01 04 69 02 FF	ZoomPosition data Continuous Output On/Off
	Off	8x 01 04 69 03 FF	
	(Reply)	y0 07 04 69 0p 0p 0q 0q 0q 0q FF	
CAM_ZoomPosRe plyIntervalTimeSet		8x 01 04 6A 00 00 0p 0p FF	pp: Interval Time [Vertical timing]
CAM_Continuous FocusPosReply	On	8x 01 04 16 02 FF	FocusPosition data Continuous Output On/Off
	Off	8x 01 04 16 03 FF	
	(Reply)	y0 07 04 16 00 00 0p 0p 0p 0p FF	
CAM_FosPosReply IntervalTimeSet		8x 01 04 6A 00 00 0p 0p FF	pp: Interval Time [Vertical timing]



**Command Set**

Command Set	Command	Packet	Comments																																																																																																																																				
CAM_MultiLineTitle	Title Set1	8x 01 04 73 1L 00 nn pp qq 00 00 00 00 00 00 FF	L: Line Number 0~0xA nn: H-position 0~0x1F pp: Color 0:WHT 1:YEL 2:MAG 3:RED qq: Blink 0:Not blink 1:Blinks																																																																																																																																				
	Title Set2	8x 01 04 73 2L mm nn pp qq rr ss tt uu vv ww FF	L: Line Number, mnpqrstuvw: Setting of characters (1 to 10)																																																																																																																																				
	Title Set3	8x 01 04 73 3L mm nn pp qq rr ss tt uu vv ww FF	L: Line Number, mnpqrstuvw: Setting of characters (11 to 20)																																																																																																																																				
			<table border="1"> <tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td><td>H</td><td>0x00,</td><td>0x01,</td><td>...</td><td>0x07</td></tr> <tr><td>I</td><td>J</td><td>K</td><td>L</td><td>M</td><td>N</td><td>O</td><td>P</td><td>0x08,</td><td>0x09,</td><td>...</td><td>0x0f</td></tr> <tr><td>Q</td><td>R</td><td>S</td><td>T</td><td>U</td><td>V</td><td>W</td><td>X</td><td>0x10,</td><td>0x11,</td><td>...</td><td>0x17</td></tr> <tr><td>Y</td><td>Z</td><td>&amp;</td><td>?</td><td>!</td><td>1</td><td>2</td><td></td><td>0x18,</td><td>0x19,</td><td>...</td><td>0x1f</td></tr> <tr><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>0</td><td>0x20,</td><td>0x21,</td><td>...</td><td>0x27</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x28,</td><td>0x29,</td><td>...</td><td>0x2f</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x30,</td><td>0x31,</td><td>...</td><td>0x37</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x38,</td><td>0x39,</td><td>...</td><td>0x3f</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x40,</td><td>0x41,</td><td>...</td><td>0x47</td></tr> <tr><td></td><td>"</td><td>:</td><td>'</td><td>.</td><td>,</td><td>/</td><td>-</td><td>0x48,</td><td>0x49,</td><td>...</td><td>0x4f</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x50,</td><td>0x51,</td><td>...</td><td>0x57</td></tr> </table>	A	B	C	D	E	F	G	H	0x00,	0x01,	...	0x07	I	J	K	L	M	N	O	P	0x08,	0x09,	...	0x0f	Q	R	S	T	U	V	W	X	0x10,	0x11,	...	0x17	Y	Z	&	?	!	1	2		0x18,	0x19,	...	0x1f	3	4	5	6	7	8	9	0	0x20,	0x21,	...	0x27									0x28,	0x29,	...	0x2f									0x30,	0x31,	...	0x37									0x38,	0x39,	...	0x3f									0x40,	0x41,	...	0x47		"	:	'	.	,	/	-	0x48,	0x49,	...	0x4f									0x50,	0x51,	...	0x57
	A	B	C	D	E	F	G	H	0x00,	0x01,	...	0x07																																																																																																																											
	I	J	K	L	M	N	O	P	0x08,	0x09,	...	0x0f																																																																																																																											
	Q	R	S	T	U	V	W	X	0x10,	0x11,	...	0x17																																																																																																																											
	Y	Z	&	?	!	1	2		0x18,	0x19,	...	0x1f																																																																																																																											
3	4	5	6	7	8	9	0	0x20,	0x21,	...	0x27																																																																																																																												
								0x28,	0x29,	...	0x2f																																																																																																																												
								0x30,	0x31,	...	0x37																																																																																																																												
								0x38,	0x39,	...	0x3f																																																																																																																												
								0x40,	0x41,	...	0x47																																																																																																																												
	"	:	'	.	,	/	-	0x48,	0x49,	...	0x4f																																																																																																																												
								0x50,	0x51,	...	0x57																																																																																																																												
Title Clear	8x 01 04 74 1p FF	Title Setting clear (p: 0 to a, f= all lines)																																																																																																																																					
On	8x 01 04 74 2p FF	Title display On/Off (0 to a, f= all lines)																																																																																																																																					
Off	8x 01 04 74 3p FF																																																																																																																																						
CAM_MD	On	8x 01 04 1B 02 FF	Motion Detection On/Off																																																																																																																																				
	Off	8x 01 04 1B 03 FF																																																																																																																																					
	Function Set	8x 01 04 1C 0m 0n 0p 0q 0r 0s FF	m: Display mode 0-Off 1-On n: Detection Frame Set bit0-Frame0, bit1-Frame1, bit2-Frame2, bit3-Frame3 pq: Threshold Level (00 to 0x14) rs: Interval Time set (00 to 0xF)																																																																																																																																				
	Window Set	8x 01 04 1D 0m pp qq rr ss FF	m: Select Detection Frame (0, 1, 2, 3) pp: Start Horizontal Position (00 to 0x3C) qq: Start Vertical Position (00 to 0x28) rr: Stop Horizontal Position (01 to 0x3C) ss: Stop Vertical Position (01 to 0x28)																																																																																																																																				
	Alarm (Reply)	y0 07 04 1B 0p FF	p: Detection Frame Number																																																																																																																																				



**Command Set**

Command Set	Command	Packet	Comments
CAM_PrivacyZone	SetMask	8x 01 04 76 mm nn Or Or Os Os FF	mm: Mask Settings nn: 00-Modify, 01-New rr: W ss: H
	Display	8x 01 04 77 pp pp pp pp FF	Mask Display ON/OFF pp pp pp pp: Mask Settings (0: OFF, 1: ON)
	SetMaskColor	8x 01 04 78 pp pp pp pp qq rr FF	pp pp pp pp: Mask Color Settings qq: Color Setting when 0 is selected rr: Color Setting when 1 is selected
	SetPanTiltAngle	8x 01 04 79 0p 0p 0p 0q 0q 0q FF	Pan/Tilt Angle Settings ppp: Pan 0~4095(0xFFF) 360/4096 Resolution qqq: Tilt 0~4095(0xFFF) 360/4096 Resolution
	SetPTZMask	8x 01 04 7B mm 0p 0p 0p 0q 0q 0q Or Or Or Or FF	Pan/Tilt/Zoom Settings for Mask ppp: Pan 0~0xFFF qqq: Tilt 0~0xFFF rrrr: Zoom pos 0~0x4000
	Non_InterlockMask	8x 01 04 6F mm 0p 0p 0q 0q Or Or Os Os FF	mm: Non_Interlock Mask Settings pp: X, q: Y, rr: W, ss: H
	GridOn	8x 01 04 7C 02 FF	Grid Display ON/OFF
	GridOff	8x 01 04 7C 03 FF	Grid/Center Line Display Off
	CenterLineOn	8x 01 04 7C 04 FF	Center Line Display On
CAM_Register Value		8x 01 04 24 mm 0p 0p FF	mm: Register No. (=00-7F) pp: Register Value (=00-7F)
CAM_ChromaSuppress		8x 01 04 5F pp FF	pp: Chroma Suppress setting level 00: OFF, 1 to 3: ON (3 levels). Effect increases as the level number increases.
CAM_ColorGain	Direct	8x 01 04 49 00 00 00 0p FF	p: Color Gain setting 0h (60%) to Eh (200%)
CAM_ColorHue	Direct	8x 01 04 4F 00 00 00 0p FF	p: Color Hue setting 0h (- 14 degrees) ~ Eh (+14 degrees)
CAM_Gamma Offset	Direct	8x 01 04 1E 00 00 00 0s 0t 0u FF	s: Polarity offset (0 is plus 1 is minus) tu: Offset s=0 (00h to 40h) Offset s=1 (00h to 10h)
CAM_Contrast	Direct	8x 01 7E 04 51 0p 0q FF	pq: 00 - 14h
ImageBrightness	Direct	8x 01 7E 04 52 0p 0q FF	pq: Image brightness level (00 - 14h)





**Command Set**

Command Set	Command	Packet	Comments
CAM_ExColorGain	Direct	8x 01 04 1F 49 00 0r 0p 0q FF	Color Gain Setting r: Color 0:All, 1:Magenta, 2:Red, 3:Yellow, 4:Green, 5:Cyan, 6:Blue pq: Color Gain setting level pq=00h (0%) to FFh (200%)
CAM_ExColorHue	Direct	8x 01 04 1F 4F 00 0r 0p 0q FF	Color Hue Setting r: Color 0:All, 1:Magenta, 2:Red, 3:Yellow, 4:Green, 5:Cyan, 6:Blue pq: Color Phase setting level pq=00h (-14 degrees) to FFh (14 degrees)





**Register Set**

Command Set	Command	Packet	Comments
BaudRate		8x 01 04 24 00 00 0p FF	p: 0-9600 1-19200 2-38400 3-115200
Monitoring Mode		8x 01 04 24 72 0p 0p FF	pp: 1-1080i@59.94 2-1080i@60 4-1080i@50 6-1080p@29.97 7-1080p@30 8-1080p@25 9-720p@59.94 A-720p@60 C-720p@50 E-720p@29.97 F-720p@30 11-720p@25 13-1080p@59.94 14-1080p@50 15-1080p@60
Output enable		8x 01 04 24 73 00 0p FF	p: 0-CVBS/LVDS Off 1-CVBS On, LVDS Off 2-LVDS video On, CVBS Off 3-LVDS & CVBS On 4-SDI video On, CVBS//LVDS Off 5-SDI & CVBS On, LVDS Off 6-SDI & LVDS On CVBS Off 7-SDI & LVDS & CVBS On SDI always On (SDI supported model)
LVDS Mode		8x 01 04 24 74 00 0p FF	p: 0-LVDS Single output 1-Dual Output
Key Input enable		8x 01 04 24 70 00 0p FF	p: 0-Key input disable 1-enable
Wide limit		8x 01 04 24 50 0p 0p FF	pp: 0~FF refer <b>Table</b>
Tele limit		8x 01 04 24 51 0p 0p FF	pp: 0~FF refer <b>Table</b>
D-Zoom Max		8x 01 04 24 52 0p 0p FF	pp: Max D-zoom ratio = 256/ (256-pp)
Auto Slow Shutter Limit		8x 01 04 24 59 00 0p FF	p: 1-1/30 2-1/15 3-1/8 4-1/4 5-1/2 6-1/1





**Register Set**

Command Set	Command	Packet	Comments
AF_InOutdoor		8x 01 04 24 4B 00 0p FF	p: 0-AF Indoor Mode 1-AF Outdoor Mode
MacroLens		8x 01 04 24 7C 00 0p FF	p: 0-disable 1-use macro lens
AF speed		8x 01 04 24 7E 00 0p FF	p: 0-normal 1-High AF speed





**Inquiry Command**

Inquiry Command	Command Packet	Inquiry Packet	Comments
CAM_PowerInq	8x 09 04 00 FF	y0 50 02 FF	On (always On)
CAM_ZoomPosInq	8x 09 04 47 FF	y0 50 0p 0q 0r 0s FF	pqrs: Zoom Position (refer <a href="#">Table</a> )
CAM_DZoomModelInq	8x 09 04 06 FF	y0 50 02 FF	D-Zoom On
		y0 50 03 FF	D-Zoom Off
CAM_Dzoom C/SModelInq	8x 09 04 36 FF	y0 50 00 FF	Combine Mode
		y0 50 01 FF	Separate Mode
CAM_DZoomPosInq	8x 09 04 46 FF	y0 50 00 00 0p 0q FF	pq: D-Zoom Position
CAM_FocusModelInq	8x 09 04 38 FF	y0 50 02 FF	Auto Focus
		y0 50 03 FF	Manual Focus
CAM_FocusPosInq	8x 09 04 48 FF	y0 50 0p 0q 0r 0s FF	pqrs: Focus Position (0x1000 - 0xC000)
CAM_FocusNearLimitInq	8x 09 04 28 FF	y0 50 0p 0q 0r 0s FF	pqrs: Focus Near Limit Position
CAM_SpotFocusModelInq	8x 09 05 08 FF	y0 50 02 F	On
		y0 50 03 F	Off
SpotFocusParameterInq	8x 09 05 69 00 FF	y0 50 0p 0q 0r 0s FF	Starting point(X1, Y1), End point(X2, Y2) p:X1, q:Y1, r:X2, s:Y2
CAM_SpotFocusDisplnq	8x 09 05 15 FF	y0 50 0p FF	p: SpotFocus display 2-On 3-Off
CAM_AFSensitivityInq	8x 09 04 58 FF	y0 50 02 FF	AF Sensitivity Normal
		y0 50 03 FF	AF Sensitivity Low
CAM_AFModelInq	8x 09 04 57 FF	y0 50 00 FF	Normal AF
		y0 50 01 FF	Interval AF
		y0 50 02 FF	Zoom Trigger AF
CAM_AFTimeSettingInq	8x 09 04 27 FF	y0 50 0p 0q 0r 0s FF	pq: Movement Time rs: Interval Time
CAM_SpotAWBModelInq	8x 09 05 09 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
SpotAWBParameterInq	8x 09 05 6B 00 FF	y0 50 0p 0q 0r 0s FF	Starting point(X1, Y1), End point(X2, Y2) p:X1, q:Y1, r:X2, s:Y2
CAM_SpotAWBDisplnq	8x 09 05 17 FF	y0 50 0p FF	p: SpotAWB display 2-On 3-Off
CAM_WBModelInq	8x 09 04 35 FF	y0 50 00 FF	Auto
		y0 50 01 FF	InDoor
		y0 50 02 FF	OutDoor
		y0 50 03 FF	One Push WB
		y0 50 04 FF	ATW
		y0 50 05 FF	Manual



**Inquiry Command**

Inquiry Command	Command Packet	Inquiry Packet	Comments
CAM_RGainInq	8x 09 04 43 FF	y0 50 00 00 0p 0q FF	pq: R Gain
CAM_BGainInq	8x 09 04 44 FF	y0 50 00 00 0p 0q FF	pq: B Gain
CAM_RGainOffsetInq	8x 09 7E 01 43 FF	y0 50 0p 0q FF	pq: R GainOffset 0~100(64h)
CAM_BGainOffsetInq	8x 09 7E 01 44 FF	y0 50 0p 0q FF	pq: B GainOffset 0~100(64h)
CAM_AEModeInq	8x 09 04 39 FF	y0 50 00 FF y0 50 03 FF y0 50 0A FF y0 50 0B FF y0 50 0D FF	Full Auto Manual Shutter Priority Iris Priority Bright
CAM_SlowShutterMode Inq	8x 09 04 5A FF	y0 50 02 FF y0 50 03 FF	Auto Manual
CAM_ShutterPosInq	8x 09 04 4A FF	y0 50 00 00 0p 0q FF	pq: Shutter Position
CAM_IrisPosInq	8x 09 04 4B FF	y0 50 00 00 0p 0q FF	pq: Iris Position
CAM_GainPosInq	8x 09 04 4C FF	y0 50 00 00 0p 0q FF	pq: Gain Position
CAM_GainLimitInq	8x 09 04 2C FF	y0 50 0p FF	p: Gain Limit
CAM_BrightPosInq	8x 09 04 4D FF	y0 50 00 00 0p 0q FF	pq: Bright Position
CAM_ExpCompMode Inq	8x 09 04 3E FF	y0 50 02 FF y0 50 03 FF	On Off
CAM_ExpCompPosInq	8x 09 04 4E FF	y0 50 00 00 0p 0q FF	pq: ExpComp Position
CAM_BackLightMode Inq	8x 09 04 33 FF	y0 50 02 FF y0 50 03 FF	On Off
CAM_SpotAEModeInq	8x 09 04 59 FF	y0 50 02 FF y0 50 03 FF	On Off
SpotAEPParameterInq	8x 09 05 6A 00 FF	y0 50 0p 0q 0r 0s FF	Starting point(X1, Y1), End point(X2, Y2) p:X1, q:Y1, r:X2, s:Y2
CAM_SpotAEDisplInq	8x 09 05 16 FF	y0 50 0p FF	p: SpotAE display 2-On 3-Off
CAM_AE_ResponseInq	8x 09 04 5D FF	y0 50 pp FF	pp: 01 to 0x20
CAM_WDModeInq	8x 09 04 3D FF	y0 50 02 FF y0 50 03 FF y0 50 06 FF	On Wide-D Off VE On
CAM_WDParameter Inq	8x 09 04 2D FF	y0 50 0p 0p 0q 0r 0s 0t 0u 00 00 FF	q: Display brightness level (0: Dark to 6: Bright) r: Brightness compensation selection (0: Very dark, 1: Dark, 2: Standard, 3: Bright) s: Compensation level (0: Low, 1: Mid, 2: High) tu: 0



**Inquiry Command**

Inquiry Command	Command Packet	Inquiry Packet	Comments
CAM_DefogInq	8x 09 04 37 FF	y0 50 02 0p FF y0 50 03 00 FF	On p: Defog level(0:auto, 1:low, 2:mid, 3:high) Off
CAM_ApertureInq	8x 09 04 42 FF	y0 50 00 00 0p 0q FF	pq: Aperture(Sharpness-edge enhancement)
CAM_HRModelInq	8x 09 04 52 FF	y0 50 02 FF y0 50 03 FF	On (Hi-Resolution) Off
CAM_NRModelInq	8x 09 04 53 FF	y0 50 0p FF	Noise Reduction p: (0: OFF, level 1 to 5)
CAM_NR2D3DInq	8x 09 05 53 FF	y0 50 0p 0q FF	p: 2D NR level (0: Off, 01 to 05: level 1 to 5) q: 3D NR level (0: Off, 01 to 05: level 1 to 5)
CAM_GammaInq	8x 09 04 5B FF	y0 50 0p FF	Gamma p: 0 to 9
CAM_GammaOffset Inq	8x 09 04 1E FF	y0 50 00 00 00 0s 0t 0u FF	s: Polarity offset (0 is plus, 1 is minus) tu: Offset s=0 (00h to 40h) Offset s=1 (00h to 10h)
CAM_HighSensitivity Inq	8x 09 04 5E FF	y0 50 02 FF y0 50 03 FF	On Off
LR_ReverseModelInq	8x 09 04 61 FF	y0 50 02 FF y0 50 03 FF	On Off
FreezeModelInq	8x 09 04 62 FF	y0 50 02 FF y0 50 03 FF	On Off
PictureEffectModelInq	8x 09 04 63 FF	y0 50 00 FF	Off
		y0 50 02 FF	Neg.Art
		y0 50 04 FF	B&W
		y0 50 1p FF	p : 0(Reddish1) ~ 3(Reddish4)
		y0 50 2p FF	p : 0(Bluish1) ~ 3(Bluish4)
		y0 50 3p FF	p : 0(Greenish1) ~ 3(Greenish4)
PictureFlipModelInq	8x 09 04 66 FF	y0 50 02 FF y0 50 03 FF	On Off
ICRModelInq	8x 09 04 01 FF	y0 50 02 FF y0 50 04 FF y0 50 03 FF	On ICR Mode On (Color) Off
AutoICRModelInq	8x 09 04 51 FF	y0 50 02 FF y0 50 04 FF y0 50 03 FF	On Auto ICR Mode On (Color) Off
AutoICRThresholdInq	8x 09 04 21 FF	y0 50 00 00 0p 0q FF	pq: ICR ON - OFF Threshold Level
AutoICRAAlarmReply Inq	8x 09 04 31 FF	y0 50 02 FF y0 50 03 FF	On Off



**Inquiry Command**

Inquiry Command	Command Packet	Inquiry Packet	Comments
MemoryInq	8x 09 04 3F FF	y0 50 pp FF	pp: Memory number recalled last
MemSaveInq	8x 09 04 23 0X FF	y0 50 0p 0p 0q 0q FF	X: 00 to 07 (Address) ppq: 0x0000 to 0xFFFF (Data)
DisplayModelInq	8x 09 04 15 FF	y0 50 02 FF	On
	(8x 09 06 06 FF)	y0 50 03 FF	Off
StabilizerModelInq	8x 09 04 34 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
		y0 50 00 FF	Hold
TitleDisplayModelInq	8x 09 04 74 FF	y0 50 02 FF	On
	(8x 09 06 06 FF)	y0 50 03 FF	Off
MuteModelInq	8x 09 04 75 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
PrivacyDisplayInq	8x 09 04 77 FF	y0 50 pp pp pp pp FF	pp pp pp pp: Mask Display (0: OFF 1: ON)
PrivacyPanTiltInq	8x 09 04 79 FF	y0 50 0p 0p 0p 0q 0q 0q FF	ppp: Pan qqq: Tilt
PrivacyPTZInq	8x 09 04 7B mm FF	y0 50 0p 0p 0p 0q 0q 0q	mm: Mask Settings
		Or Or Or Or FF	ppp: Pan
			qqq: Tilt
			rrrr: Zoom
PrivacyMonitorInq	8x 09 04 6F FF	y0 50 pp pp pp pp FF	pp pp pp pp: Mask is displayed now.
CAM_CenterLineInq	8x 09 04 7C FF	y0 50 03 FF	Display Off
		y0 50 04 FF	Center line Display On
		y0 50 02 FF	Grid line Display On
CAM_IDInq	8x 09 04 22 FF	y0 50 0p 0q 0r 0s FF	pqrs: Camera ID
MDModelInq	8x 09 04 1B FF	y0 50 02 FF	On
		y0 50 03 FF	Off
MDFunctionInq	8x 09 04 1C FF	y0 50 0m 0n 0p 0q 0r 0s FF	m: Display mode 0-Off 1-On n: Detection Frame Set bit0-Frame0 bit1-Frame1 bit2-Frame2 pq: Threshold Level (0 to 0x14)
MDWindowInq	8x 09 04 1D 0m FF	y0 50 pp qq rr ss FF	m: Select Detection Frame (0 1 2 3) pp: Start Horizontal Position (00 to 0x3C) qq: Start Vertical Position (00 to 0x28) rr: Stop Horizontal Position (01 to 0x3C) ss: Stop Vertical Position (01 to 0x28)



**Inquiry Command**

Inquiry Command	Command Packet	Inquiry Packet	Comments
ContinuousZoomPos	8x 09 04 69 FF	y0 50 02 FF	On
ReplyModelInq		y0 50 03 FF	Off
ReplyIntervalTimeInq	8x 09 04 6A FF	y0 50 00 00 0p 0p FF	pp: Interval Time [VD timing]
ChromaSuppressInq	8x 09 04 5F FF	y0 50 pp FF	pp: Chroma Suppress setting level
ColorGainInq	8x 09 04 49 FF	y0 50 00 00 00 0p FF	p: Color Gain setting 0h (60%) to Eh (200%)
ColorHueInq	8x 09 04 4F FF	y0 50 00 00 00 0p FF	p: Color Hue setting 0h (? 14 degrees) ~ Eh (+ 14 degrees)
CAM_GammaOffsetInq	8x 09 04 1E FF	y0 50 00 00 00 0s 0t 0u FF	s: Polarity offset (0 is plus, 1 is minus) tu: Offset s=0 (00h to 40h) Offset s=1 (00h to 40h)
CAM_HLCInq	8x 09 04 14 FF	y0 50 0p 0q FF	p: HLC level (0: OFF, 1: ON) q: HLC mask level (0 to F: from low to high level)
CAM_MenuInq	8x 09 06 06 FF	y0 50 0p FF	p: 2-ON 3-OFF
CAM_ExColorGainInq	8x 09 04 1F 49 0r FF	y0 50 0p 0q FF	r: Color 0:All, 1:Magenta, 2:Red, 3:Yellow, 4:Green, 5:Cyan, 6:Blue pq: Gain setting level pq= 00h (0%) to FFh (200%)
CAM_ExColorHueInq	8x 09 04 1F 4F 0r FF	y0 50 0p 0q FF	r: Color 0:All, 1:Magenta, 2:Red, 3:Yellow, 4:Green, 5:Cyan, 6:Blue pq: Phase setting level pq= 00h (-14 degree) to FFh (+14 degree)
CAM_ContrastInq	8x 09 7E 04 51 FF	y0 50 0p 0q FF	pq: 00 ~ 14h
ImageBrightnessInq	8x 09 7E 04 52 FF	y0 50 0p 0q FF	pq: Image brightness level (00 - 14h)
CAM_FlickerlessInq	8x 09 7E 04 53 FF	y0 50 0p FF	p: 0-AUTO 2-ON 3-OFF
CAM_MinShutterInq	8x 09 04 12 FF	y0 50 02 FF y0 50 03 FF	On Off
CAM_MinShutterLimitInq	8x 09 04 13 FF	y0 50 00 00 0p 0q FF	pq: MinShutter Position





**Inquiry Command : Register**

Inquiry Command	Command Packet	Inquiry Packet	Comments
BaudRate	8x 09 04 24 00 FF	y0 50 00 0p FF	p: 0-9600 1-19200 2-38400 3-115200
Monitoring Mode	8x 09 04 24 72 FF	y0 50 0p 0p FF	pp: 1-1080i@59.94 2--1080i@60 4-1080i@50 6-1080p@29.97 7-1080p@30 8-1080p@25 9-720p@59.94 A-720p@60 C-720p@50 E-720p@29.97 F-720p@30 11-720p@25 13-1080p@59.94 14-1080p@50 15-1080p@60
Output enable	8x 09 04 24 73 FF	y0 50 00 0p FF	p: 1-CVBS On, LVDS/SDI Off 2-LVDS video On, CVBS/SDI Off 3-LVDS & CVBS On, SDI Off 4-SDI video On, CVBS//LVDS Off 5-SDI & CVBS On, LVDS Off 6-SDI & LVDS On CVBS Off 7-SDI & LVDS & CVBS On SDI always On (SDI supported model)
LVDS Mode	8x 09 04 24 74 FF	y0 50 00 0p FF	p: 0-LVDS Single output 1-Dual output
Key Input enable	8x 09 04 24 70 FF	y0 50 00 0p FF	p: 0-Key input disable 1-enable
Wide limit	8x 09 04 24 50 FF	y0 50 0p 0p FF	pp: 0~FF refer <b>Table</b>
Tele limit	8x 09 04 24 51 FF	y0 50 0p 0p FF	pp: 0~FF refer <b>Table</b>
E-Zoom Max	8x 09 04 24 52 FF	y0 50 0p 0p FF	pp: Max D-zoom ratio = 256/ (256-pp)
Auto Slow Shutter Limit	8x 09 04 24 59 FF	y0 50 00 0p FF	p: 1-1/30 2-1/15 3-1/8 4-1/4 5-1/2 6-1/1





**Inquiry Command : Register**

Inquiry Command	Command Packet	Inquiry Packet	Comments
AF_InOutdoor	8x 09 04 24 4B FF	y0 50 00 0p FF	p: 0-AF Indoor Mode 1-AF Outdoor Mode
MacroLens	8x 09 04 24 7C FF	y0 50 00 0p FF	p: 0-disable 1-use macro lens
AF speed	8x 09 04 24 7E FF	y0 50 00 0p FF	p: 0-Normal 1-High AF speed





**Block Inquiry Command**

**Lens Control** System Inquiry Commands

Command Packet 8x 09 7E 7E 00 FF

Byte	Bit	Comments	MIN	MAX
0	[7:4] [3:0]	Destination Address Source Address		
1	[7:0]	Completion Message (50h)		
2	[7:4] [3:0]	0 Zoom Position (HH)	00h	4000h(7AC0h)
3	[7:4] [3:0]	0 Zoom Position (HL)		
4	[7:4] [3:0]	0 Zoom Position (LH)		
5	[7:4] [3:0]	0 Zoom Position (LL)		
6	[7:4] [3:0]	0 Focus Near Limit (H)		
7	[7:4] [3:0]	0 Focus Near Limit (L)		
8	[7:4] [3:0]	0 Focus Position (HH)	1000h	D000h
9	[7:4] [3:0]	0 Focus Position (HL)		
10	[7:4] [3:0]	0 Focus Position (LH)		
11	[7:4] [3:0]	0 Focus Position (LL)		
12	[7:0]	0		
13	[7:6] [5] [4:3] [2] [1] [0]	DZoomMode 0: Combine 1: Separate 0: Normal 1: Interval 2: Zoom Trigger AF Sensitivity 0: Low 1: Normal Digital Zoom 1: On 0: Off Focus Mode 0: Manual 1: Auto		
14	[7:4] [1] [0]	0 Focus Command 1: Executing 0: Stopped Zoom Command 1: Executing 0: Stopped		
15	[7:0]	Terminator (FFh)		





**Block Inquiry Command**

**Camera Control** System Inquiry Commands    Command Packet 8x 09 7E 7E 01 FF

Byte	Bit	Comments	MIN	MAX
0	[7:4] [3:0]	Destination Address Source Address		
1	[7:0]	Completion Message (50h)		
2	[7:4] [3:0]	R Gain (H)	00h	FFh
3	[7:4] [3:0]	R Gain (L)		
4	[7:4] [3:0]	B Gain (H)	00h	FFh
5	[7:4] [3:0]	B Gain (L)		
6	[7:4] [3:0]	WB Mode		
7	[7:4] [3:0]	Aperture(Sharpness-edge enhancement) Gain	00h	Fh
8	[7:4] [3:0]	Exposure Mode		
9	[7:6] [5] [4] [3] [2] [1] [0]	High Resolution 1: On 0: Off VE 0:Off, 1:VE (Wide-D or VE) Spot AE 1: On 0: Off Backlight 1: On 0: Off Exposure Comp. 1: On 0: Off Slow Shutter 1: On 0: Off		
10	[6] [4:0]	Spot AWB 1:On 0:Off Shutter Position	00h	15h
11	[7:0]	Iris Position	00h	11h
12	[7:0]	Gain Position	01h	Fh
13	[7:0]	Bright Position	00h	1Fh
14	[7:0]	Exposure Comp. Position	00h	0Eh
15	[7:0]	Terminator (FFh)		





**Block Inquiry Command**

**Other** Inquiry Commands Command Packet 8x 09 7E 7E 02 FF

Byte	Bit	Comments	MIN	MAX
0	[7:4]	Destination Address		
	[3:0]	Source Address		
1	[7:0]	Completion Message (50h)		
2	[4]	ICR Mode (1:Color 0:BW)		
	[3]	Auto ICR Alarm (1: On, 0: Off)		
	[2:1]	Auto ICR 2: On 0: Off 3:On(Color)		
	[0]	Power 1: On 0: Off		
3	[6]	Stabilizer 1: On 0: Off		
	[5]	Stabilizer Hold 1: Hold 0: Off		
	[4]	ICR 1: On 0: Off		
	[3]	Freeze 1: On 0: Off		
	[2]	LR Reverse 1: On 0: Off		
	[1:0]	0		
4	[5]	Privacy Zone 1: On 0: Off		
	[4]	Mute 1: On 0: Off		
	[3]	Title Display 1: On 0: Off		
	[2]	Display 1: On 0: Off		
	[1:0]	0		
5	[3:0]	Picture Effect Mode		
6	[7:0]	0		
7	[7:0]	0		
8	[3:0]	Camera ID (HH)	0000h	FFFFh
9	[3:0]	Camera ID (HL)		
10	[3:0]	Camera ID (LH)		
11	[3:0]	Camera ID (LL)		
12	[4]	Memory 1: Provided 0: Not provided		
	[3]	0		
	[2]	ICR 1: Provided 0: Not Provided		
	[1]	Stabilizer 1: Provided 0: Not provided		
	[0]	System 1: 1/50, 1/25 0: 1/60, 1/30		
13	[7:0]	0		
14	[7:0]	0		
15	[7:0]	Terminator (FFh)		





## Block Inquiry Command

Extended Function1 Query Command Command Packet 8x 09 7E 7E 03 FF

Byte	Bit	Comments	MIN	MAX
0	[7:4]	Destination Address		
	[3:0]	Source Address		
1	[7:0]	Completion Message (50h)		
2	[7:4]	0	00h	EBh
	[3:0]	Digital Zoom Position (H)		
3	[7:4]	0	00h	FFh
	[3:0]	Digital Zoom Position (L)		
4	[7:4]	0	00h	FFh
	[3:0]	AF Activation Time (H)		
5	[7:4]	0	00h	FFh
	[3:0]	AF Activation Time (L)		
6	[7:4]	0	00h	FFh
	[3:0]	AF Interval Time (H)		
7	[7:4]	0	00h	FFh
	[3:0]	AF Interval Time (L)		
8	[7:4]	0	00h	0Fh
	[3:0]	Spot AE Position (X)		
9	[7:4]	0	00h	0Fh
	[3:0]	Spot AE Position (Y)		
10	[2]	MD (1: On, 0: Off)		
	[1]	0		
	[0]	E-Flip (1: On, 0: Off)		
11	[6:3]	Color Gain (0h (60%) to Eh (200%))	00h	0Eh
	[2]			
	[1]	Reserved		
	[0]	E-Flip (1: Provided, 0: Not provided)		
12	[7:5]	0		
	[4:0]	AE Response		
13	[6:4]	Gamma	00h	09h
	[3]			
14	[2:0]	NR Level	00h	3h
	[6:4]	Chroma suppress		
15	[3:0]	Gain Limit	01h	Fh
	[7:0]	Terminator (FFh)		





**Block Inquiry Command**

**Extended Function2** Query Command    Command Packet 8x 09 7E 7E **04** FF

Byte	Bit	Comments	MIN	MAX
0	[7:4]	Destination Address		
	[3:0]	Source Address		
1	[7:0]	Completion Message (50h)		
2	[7:2]	0		
	[1:0]	VE 0: Off    2: VE On		
3	[7:0]	0		
4	[7:3]	0		
	[2:0]	Display brightness level setting 0: Dark to 6: Bright		
5	[7:2]	0		
	[1:0]	Brightness compensation selection 0: Very dark 1: Dark 2: Standard 3: Bright		
6	[7:2]	0		
	[1:0]	Compensation level    0: Low 1: Mid 2: High		
7	[7:1]	0		
	[0]	Defog 0: Off 1: On		
8	[7:2]	0		
	[1:0]	Defog Level 1: low 2: mid 3: high		
9	[7:0]	0		
10	[7:0]	0		
11	[7:0]	0		
12	[7:0]	0		
13	[7:0]	0		
14	[7:0]	0		
15	[7:0]	Terminator (FFh)		



## Block Inquiry Command

Extended Function3 Query Command Command Packet 8x 09 7E 7E 05 FF

Byte	Bit	Comments	MIN	MAX
0	[7:4]	Destination Address		
	[3:0]	Source Address		
1	[7:0]	Completion Message (50h)		
2	[7:4]	0		
	[3:0]	Color Hue (0h(- 14 degrees) to Eh(+ 14 degrees))	00h	0Eh
3	[7]	0		
	[6:0]	Magenta Gain	00h	0Eh
4	[7]	0		
	[6:0]	Magenta Hue	00h	0Eh
5	[7]	0		
	[6:0]	Red Gain	00h	0Eh
6	[7]	0		
	[6:0]	Red Hue	00h	0Eh
7	[7]	0		
	[6:0]	Yellow Gain	00h	0Eh
8	[7]	0		
	[6:0]	Yellow Hue	00h	0Eh
9	[7]	0		
	[6:0]	Green Gain	00h	0Eh
10	[7]	0		
	[6:0]	Green Hue	00h	0Eh
11	[7]	0		
	[6:0]	Cyan Gain	00h	0Eh
12	[7]	0		
	[6:0]	Cyan Hue	00h	0Eh
13	[7]	0		
	[6:0]	Blue Gain	00h	0Eh
14	[7]	0		
	[6:0]	Blue Hue	00h	0Eh
15	[7:0]	Terminator (FFh)		







## TABLE.

## Shutter Speed

Value	NTSC	PAL
15	1/10000 (1/20000)	1/10000 (1/20000)
14	1/6000 (1/12000)	1/6000 (1/12000)
13	1/4000 (1/8000)	1/3500 (1/7000)
12	1/3000 (1/6000)	1/2500 (1/5000)
11	1/2000 (1/4000)	1/1750 (1/3500)
10	1/1500 (1/3000)	1/1250 (1/2500)
0F	1/1000 (1/2000)	1/1000 (1/2000)
0E	1/725 (1/1450)	1/600 (1/1200)
0D	1/500 (1/1000)	1/425 (1/850)
0C	1/350 (1/700)	1/300 (1/600)
0B	1/250 (1/500)	1/215 (1/430)
0A	1/180 (1/360)	1/150 (1/300)
09	1/125 (1/250)	1/120 (1/240)
08	1/100 (1/200)	1/100 (1/200)
07	1/90 (1/180)	1/75 (1/150)
06	1/60 (1/120)	1/50 (1/100)
05	1/30 (1/60)	1/25 (1/50)
04	1/15 (1/30)	1/12 (1/25)
03	1/8 (1/15)	1/6 (1/12)
02	1/4 (1/8)	1/3 (1/6)
01	1/2 (1/4)	1/2 (1/3)
00	1/1 (1/2)	1/1 (1/2)





**Gain Table**

Value	Gain
0F	+50 dB
0E	+47 dB
0D	+43 dB
0C	+40 dB
0B	+37 dB
0A	+33 dB
09	+30 dB
08	+27 dB
07	+23 dB
06	+20 dB
05	+17 dB
04	+13 dB
03	+10 dB
02	+7 dB
01	0 dB

**Gain Limit Table**

Value	Gain Limit
0F	+50 dB
0E	+47 dB
0D	+43 dB
0C	+40 dB
0B	+37 dB
0A	+33 dB
09	+30 dB
08	+27 dB
07	+23 dB
06	+20 dB
05	+17 dB
04	+13 dB
03	+10dB
02	+7dB
01	0dB

**IRIS**

value	IRIS
11h	F1.5
10h	F2
0Fh	F2.4
0Eh	F2.8
0Dh	F3.4
0Ch	F4
0Bh	F4.8
0Ah	F5.6
09h	F6.8
08h	F8
07h	F9.6
06h	F11
05h	F14
00h	CLOSE

**Exposure Comp.**

value	comp
0Eh	(+7) 10.5 dB
0Dh	(+6) 9.0 dB
0Ch	(+5) 7.5 dB
0Bh	(+4) 6.0 dB
0Ah	(+3) 4.5 dB
09h	(+2) 3.0 dB
08h	(+1) 1.5 dB
07h	(0) 0 dB
06h	(-1) -1.5 dB
05h	(-2) -3.0 dB
04h	(-3) -4.5 dB
03h	(-4) -6.0 dB
02h	(-5) -7.5 dB
01h	(-6) -9.0 dB
00h	(-7) -10.5 dB

**Color Gain**

value	Color gain
0Eh	200%
0Dh	190%
0Ch	180%
0Bh	170%
0Ah	160%
09h	150%
08h	140%
07h	130%
06h	120%
05h	110%
04h	100%
03h	70%
02h	50%
01h	20%
00h	0%





**Bright**

value	IRIS	Gain
0F	F2.4	0 dB
0E	F2.8	0 dB
0D	F3.4	0 dB
0C	F4	0 dB
0B	F4.8	0 dB
0A	F5.6	0 dB
09	F6.8	0 dB
08	F8	0 dB
07	F9.6	0 dB
06	F11	0 dB
05	F14	0 dB
04	CLOSE	0 dB
03		
02		
01		
00	CLOSE	0 dB

value	IRIS	Gain
1F	F1.6	+50 dB
1E	F1.6	+47 dB
1D	F1.6	+43 dB
1C	F1.6	+40 dB
1B	F1.6	+37 dB
1A	F1.6	+33 dB
19	F1.6	+30 dB
18	F1.6	+27 dB
17	F1.6	+23 dB
16	F1.6	+20 dB
15	F1.6	+17 dB
14	F1.6	+13 dB
13	F1.6	+10 dB
12	F1.6	+6 dB
11	F1.6	0 dB
10	F2	0 dB





**Optical Zoom**

Optical Zoom Ratio	Optical Zoom Position Data
×1	0000
×2	153C
×3	1F24
×4	253F
×5	2982
×6	2CBA
×7	2F52
×8	3189
×9	336A
×10	350C
×11	3682
×12	37CE
×13	38FA
×14	3A05
×15	3AF1
×16	3BBC
×17	3C72
×18	3D08
×19	3D93
×20	3DFE
×21	3E5E
×22	3EB4
×23	3EF4
×24	3F34
×25	3F6A
×26	3F94
×27	3FB5
×28	3FD5
×29	3FEA
×30	4000

**Digital Zoom Combine Mode**

\* Enabled during Dzoom On

Digital Zoom Ratio	Digital Zoom Position Data
×1	4000
×2	6000
×3	6A80
×4	7000
×5	7300
×6	7540
×7	76C0
×8	7800
×9	78C0
×10	7980
×11	7A00
×12	7AC0

**Zoom Separate Mode**

Digital Zoom Ratio	Digital Zoom Position Data
×1	00
×2	80
×3	AA
×4	C0
×5	CD
×6	D6
×7	DC
×8	E0
×9	E4
×10	E7
×11	E9
×12	EB





Wide/Tele Limit

Limit Setting Value	Wide Limit	Tele Limit
00	X1.0	X30
08	X1.02	X29
10	X1.04	X28
18	X1.06	X27
20	X1.08	X26
28	X1.10	X25
30	X1.13	X24
38	X1.15	X23
40	X1.17	X22
48	X1.20	X21
50	X1.22	X20
58	X1.25	X19
60	X1.28	X18
68	X1.31	X17
70	X1.34	X16
78	X1.37	X15
80	X1.40	X14
88	X1.43	X13
90	X1.46	X12
98	X1.50	X11
A0	X1.53	X10
A8	X1.57	X9.45
B0	X1.60	X9.0
B8	X1.65	X8.60
C0	X1.69	X8.0
C8	X1.73	X7.51
D0	X1.77	X7.20
D8	X1.82	X7.0
E0	X1.86	X6.58
E8	X1.91	X6.30
F0	X1.96	X6.0
F8	X2.0	X5.78
FF	X2.07	X5.54

Focus Near Limit	
Position	Near Limit
2000	Over Inf
3000	10m
4000	5m
6000	3m
8000	2m
C000	1m
D000	50cm





## Initial Settings

Custom Recall : Custom Preset Function

Memory Recall : Camera memory Function

Mode	Factory Reset	Custom Recall	Memory Recall
Zoom Position	Wide end	○	○
D-Zoom On/Off	Off	○	○
D-Zoom Separate/Combine	Combine	○	X
D-Zoom Position	00h	○	X
Focus Position	-	○	○
Focus Auto/Manual	Auto	○	○
Near Limit	C000h	○	X
AF Sensitivity	Normal	○	X
AF Mode	Normal	○	○
AF Run Time	05h	○	X
AF Interval	05h	○	X
Spot AF On/Off	Off	○	○
Spot AF Starting point (X1, Y1)	05h, 05h	○	○
Spot AF End point (X2, Y2)	0Ah, 0Ah	○	○
WB Mode	ATW	○	○
WB Data (Rgain, Bgain)	-	○	○
AE Mode	Full Auto	○	○
AE Response	01h	○	X
Auto Slow Shutter Mode	Off	○	○
Shutter Setting	-	○	○
Iris Setting	-	○	○
Gain Setting	-	○	○
Bright Setting	-	○	○
Exposure Compensation On/Off	Off	○	○
Exposure Compensation Amount	07h	○	○
BackLight On/Off	Off	○	○
Aperture (Sharpness-edge enhancement)	07h	○	○
LR Reverse On/Off	Off	○	X
E-Flip On/Off	Off	○	X
Picture Effect	Off	○	X





Mode	Factory Reset	Custom Recall	Memory Recall
Spot AE On/Off	Off	○	○
Spot AE Starting point (X1, Y1)	04h, 04h	○	○
Spot AE End point (X2, Y2)	0Ah, 0Ah	○	○
Spot AWB On/Off	Off	○	○
Spot AWB Starting point (X1, Y1)	04h, 04h	○	○
Spot AWB End point (X2, Y2)	0Bh, 0Bh	○	○
Auto ICR On/Off/On(Color)	Off	○	○
ICR On/Off/On(Color)	Off	○	○
Auto ICR Threshold Level		○	X
Image Stabilizer On/Off/Hold	Off	○	X
Gamma	00h	○	X
Defog On/Off	Off	○	○
NR Level	Off	○	X
Gain Limit	10h	○	X
Low-Illumination Chroma Suppress	02h	○	X
Color Gain	04h	○	X
Color Hue	07h	○	X
Color Gain (Magenta)	80h	○	X
Color Gain (Red)	80h	○	X
Color Gain (Yellow)	80h	○	X
Color Gain (Cyan)	80h	○	X
Color Gain (Green)	80h	○	X
Color Gain (Blue)	80h	○	X
Color Hue (Magenta)	80h	○	X
Color Hue (Red)	80h	○	X
Color Hue (Yellow)	80h	○	X
Color Hue (Cyan)	80h	○	X
Color Hue (Green)	80h	○	X
Color Hue (Blue)	80h	○	X
WD On/Off	Off	○	○
Image Brightness	0Ah	○	X
Contrast	0Ah	○	X
Minimum Shutter Mode	Off	○	○
Minimum Shutter Limit	1/125	○	○





## APPENDIX B

### PELCO Protocol

#### PELCO “D” Byte Format

##### Command Message

Command	Data						
	BYTE 1	BYTE 2	BYTE 3	BYTE 4	BYTE 5	BYTE 6	BYTE 7
Zoom Tele	0xFF	CamID	0x00	0x20	0x00	0x00	Checksum
Zoom Wide	0xFF	CamID	0x00	0x40	0x00	0x00	Checksum
Focus Near	0xFF	CamID	0x01	0x00	0x00	0x00	Checksum
Focus Far	0xFF	CamID	0x00	0x80	0x00	0x00	Checksum
Up(Menu)	0xFF	CamID	0x00	0x08	0x00	0x00	Checksum
Down(Menu)	0xFF	CamID	0x00	0x10	0x00	0x00	Checksum
Left(Menu)	0xFF	CamID	0x00	0x04	0x00	0x00	Checksum
Right(Menu)	0xFF	CamID	0x00	0x02	0x00	0x00	Checksum
Menu On/Off	0xFF	CamID	0x40	0x00	0x00	0x00	Checksum
STOP	0xFF	CamID	0x00	0x00	****	****	Checksum

#### Pelco Keyboard (95+PATTERN)

Function	Menu On / Off						
	BYTE 1	BYTE 2	BYTE 3	BYTE 4	BYTE 5	BYTE 6	BYTE 7
MSG	0xFF	CamID	0x00	0x23	0x00	0x5F	Checksum

#### V/D Keyboard (Set Preset +98)

Function	Menu On / Off						
	BYTE 1	BYTE 2	BYTE 3	BYTE 4	BYTE 5	BYTE 6	BYTE 7
MSG	0xFF	CamID	0x00	0x03	0x00	0x62	Checksum







**Revision History**

Version	Date	Description	Remarks
2308-01		Update <u>Wide/Tele limit</u>	
2310-01		Add Spot AWB, ICR color mode, Min Shutter	

