



CAMERA BULLET IP HD RÉSISTANT À LA CORROSION

Key Functions


- Auto Exposure, Auto White Balance · Triple Stream(H.264, MJPEG)
- Onvif Profile S · Easy Install : Zero Configuration, Discovery, PoE
- Event Boosting, FTP Image Upload, Web Casting, Open VPN, QoS, IP Filtering
- Cross Web Browsing(IE, Safari, Firefox, Chrome) · Privacy Masking
- Designed to Accept Future Software Upgrades Remotely · Event Buffering



Key Features

- SUS 316L Electro-polished Stainless Steel for Optimum Corrosion Proof
- Well Balanced, Compact Unit
- Full HD(1920x1080) Resolution with Compact Design
- True WDR(120dB), True Day & Night
- Audio In/Out(1/1), Alarm In/Out(1/1)
- PoE, 12VDC
- IP67

Dimension

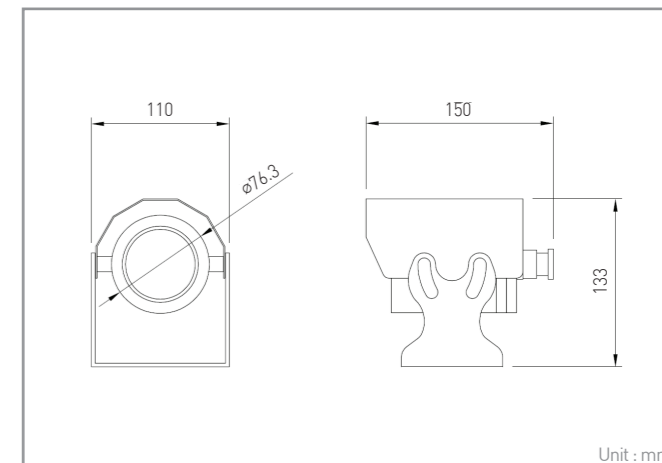

Technical Specifications

NCX-631UR

IMAGE		Video Contents Analysis	Tampering, Line Detector, Field Detector
Lens	Fixed 3.7mm, F2.5	Motion Detection Area	16 Programmable Area(Include Area 8, Exclude Area 8)
Angle of View	90°(H)	Privacy Mask Zone	8 Programmable Zone
Image Sensor	Type	Event Notification	E-mail, FTP, Notification Server, XML Notification, AIHM
	Pixels	Audio Alert	User-Defined 3 Audio Files
Min. Illumination	Color : 0.2Lux / BW : 0Lux@F2.5, 50IRE	Login Authority	Administrator, Operator, Guest
Scanning Mode	Progressive Scan	Manual Trigger	4 Programmable Trigger
Wide Dynamic Range	D-WDR(ATR-EX)	Security	Multi User Authority, IP Filtering, HTTPS, SSL
Day and Night Mode	True D/N(Auto, Day, Night)	Network Time Sync	NTP Server, Synchronized Computer, Manual
Noise Reduction	3DNR	Software Reset	Restart, Reset, Factory Default
Digital Zoom		Hardware Factory Reset	Yes
Exposure Control	Auto	Auto Recovery	Backup, Restore
White Balance Control	Auto, Incandescent, Fluorescent, Outdoor	Remote Upgrade	Web Browsing(IE, Chrome, Safari, Firefox), SmartManager
Back Light Compensation	Yes	NETWORK	
Image Effect	Flip, Mirror, Aisle, Defog, HLC, S-LDC	Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour
Flicker Free Mode	50Hz, 60Hz	Client Software	Web, SmartManager, Client S/W, Mobile S/W
Shutter Speed	Auto(1/10,000-1sec), Manual	Max. User Connection	Live : 10 Users, Playback : 3 Users
IR Illuminator	Quantity	API Support	Open API, Onvif Compliance
	Angle	Mobile Support	Android, iOS
	Distance	Up to 25m	
Motorized Lens Control	-	EXTERNAL IN/OUT	
VIDEO/AUDIO		Video Composite Out	-
Compression	H.264(Baseline, Main, High Profile), MJPEG	Audio / Alarm	1 Input, 1 Output(Terminal Block)
Bitrate Control	CVBR, VBR	Ethernet	RJ-45(10/100Base-T)
Resolution	2048x1536, 1920x1080, 1280x720/1024, 704x480/576, 640x480, 352x240/288, 320x240	ETC	
Frame Rate	Max. 25/30fps@3MP	Operating Humidity	0-90%RH(Non-Condensing)
Streaming	25/30fps(Triple Stream : H.264x2, MJPEGx1)	Operating Temperature	-20~+50°C
Composite Out	-	Power Supply	PoE(IEEE802.3af Compliance, Class0), 12VDC
Audio Compression	G.711	Power Consumption	5.7W@12VDC
Audio Streaming	2 Way	Dimension	76.2(Ø)x85.2(H)x181(D)mm
SYSTEM		Net Weight	Approx. 1.64g
		Ingress Protection	IP67

Specifications are subject to change without notice.