



CAMÉRA PTZ HD 30X RÉSISTANT À LA CORROSION

Key Functions

- Auto Exposure, Auto White Balance · Triple Stream(H.264, MJPEG)
- Onvif Profile S · Easy Install : Zero Configuration, Discovery, PoE
- Event Boosting, FTP Image Upload, Web Casting, Open VPN, QoS, IP Filtering
- Cross Web Browsing(IE, Safari, Firefox, Chrome) · Privacy Masking
- Designed to Accept Future Software Upgrades Remotely · Event Buffering



Key Features

- SUS 316L Electro-polished Stainless Steel for Optimum Corrosion Proof
- Integrated Wiper · Full HD(1920x1080) Resolution
- Optical Zoom 30X, Digital Zoom 16X
- 43 IR LEDs for 40m Coverage
- True WDR(120dB), True Day & Night
- Max. 50°/sec Speed(Preset)
- Alarm Input(1), Alarm Output(1) · 24VDC · IP67

Optional Accessory


- SUS316L Junction Box
- SUS316L Junction Box with Water tank

Technical Specifications

NCX-2203PR

IMAGE		SYSTEM		
Lens	Optical Zoom 30X, 4.3-129mm	Motion Detection Area	16 Programmable Area(Include Area 8, Exclude Area 8)	
Angle of View	65.1-2.23°(H)	Privacy Masking	16 Programmable Zone	
Image Sensor	Type	1/2.8" SONY STARVIS CMOS Sensor	Event Notification	E-mail, FTP, Notification Server, XML Notification, Audio Alert, AHM
	Pixels	1945(H)x1097(V)	Audio Alert	User-Defined 3 Audio Files
Min. Illumination	Color : 0.35Lux / BW : 0.013Lux@50IRE, 0Lux(IR LED On)	Login Authority	Administrator, Operator, Guest	
Scanning Mode	Progressive Scan	Manual Trigger	4 Programmable Trigger	
Wide Dynamic Range	True WDR(120dB)	Security	Multi User Authority, IP Filtering, HTTPS, SSL	
Day and Night Mode	True Day & Night	Network Time Sync	NTP Server, Synchronized Computer, Manual	
Noise Reduction	3DNR	Software Reset	Restart, Reset, Factory Default	
Digital Zoom	16X	Hardware Factory Reset	Yes	
Exposure Control	Auto, Manual, Shutter Priority, Iris Priority	Auto Recovery	Backup, Restore	
White Balance Control	Auto, Fluorescent, Incandescent, Outdoor, Manual	Remote Upgrade	Web Browsing(IE, Chrome, Safari, Firefox), SmartManager, NC-Titanium	
Back Light Compensation	Yes	NETWORK		
Image Effect	Flip	Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour	
Shutter Speed	25/30fps : Auto(1/30,000-x8sec), Manual	Client Software	Web, SmartManager, NC-Titanium, Tive HD	
	50/60fps : Auto(1/50,000-x8sec), Manual	Max. User Connection	Live : 10 Users, Playback : 3 Users	
IR Illuminator	Quantity	43 IR LEDs	API Support	Open API, Onvif Compliance
	Angle	78°(H)	Mobile Support	Tive HD(Android, iOS)
	Distance	Up to 40m	EXTERNAL IN/OUT	
VIDEO/AUDIO		Audio	1 Input, 1 Output(RCA Mono Jack)	
Compression	H.264(Baseline, Main, High Profile), MJPEG	Alarm	1 Input, 1 Output	
Bitrate Control	CVBR, VBR	Ethernet	RJ-45(10/100Base-T)	
Resolution	1920x1080, 1280x1024, 1280x720/960, 704x480/576, 640x360/480, 320x240	ETC		
Frame Rate	Max. 50/60fps	Operating Humidity	0-95% RH(Non-Condensing)	
Streaming	50/60fps(Dual Stream : H.264x1, MJPEGx1)	Operating Temperature	-40~+60°C	
	25/30fps(Triple Stream : H.264x2, MJPEGx1)	Power Supply	24VDC	
Audio Compression	G.711	Power Consumption	50W@24VDC	
Audio Streaming	2 Way	Dimension	320(W)x345(H)x299(D)mm	
PTZ FUNCTION		Net Weight	Approx. 18kg	
Pan Range / Pan Speed	360° / Min 0.7 °/sec ~ Max. 50°/sec.	Ingress Protection	IP67	
Tilt Range / Tilt Speed	+/-90° / Min 0.6 °/sec ~ Max. 60°/sec.			
Preset / Home Function	69 / Yes			

Dimension

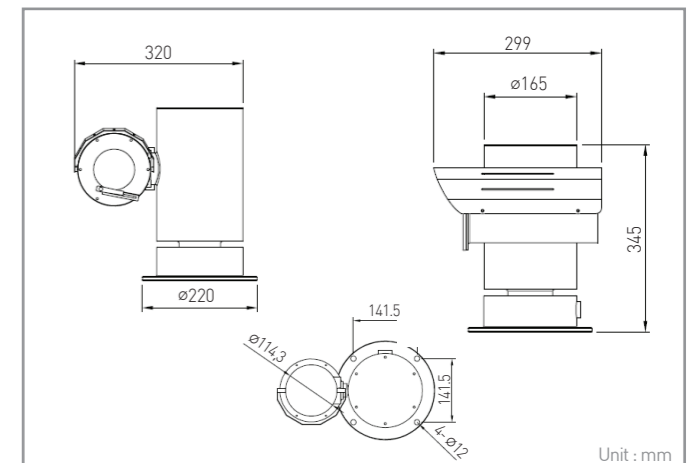

Unit : mm