

Caméra cylindrique PAL





Diamètre 19mm

GTC-190B/190WX



- 1/3.2" 1.3M SONY STARVIS CMOS
- Horizontal 800TV Lines
- CVBS(1.0Vp-p Composite 75Ω)
- Fixed lens 3.6mm
- WDR, 2DNR
- Digital D&N
- Mini Bullet Camera

GTC-190B / GTC-190WX		Privacy Mask	
Image Sensor	1/3.2" Exmor RS Progressive Scan SONY STARVIS CMOS	Image Rotation	OFF, H-FLIP, V-FLIP, HV-FLIP
Effective Pixels	1.27MP 1297(H) x 977(V)	Defog	OFF, AUTO
Max. Video Resolution	Horizontal 800TV Lines	Sharpness	0-255
Type	Board mount lens	OSD control	-
Lens Focal Length	3.6mm, F 2.0	Language	-
Angle of View	94.91 (D)x81.9 (H)x66.5 (V)	Video Output mode	CVBS(1.0Vp-p Composite 75Ω) NTSC/PAL
Min.Illumination	0.2 Lux (30IRE, F2.0, AGC MAX)	General	
Gamma	$\gamma=0.45$	IP Rating	- IP67 (Waterproof Type)
IR LEDs	-	Operating Temperature	-10°C~+50°C(Humidity less than 80%)
IR Range	-	Storage Temperature	-20°C~+60°C(Humidity less than 80%)
White Balance	ATW / PUSH / USER1 / USER2 / MANUAL / PUSH LOCK	Dimension(mm)	Φ19X54.8mm (Waterproof type)
WDR/BLC	WDR / ATR / OFF	Weight	Approx.44.7g (Waterproof type)
D-WDR	OFF / HLC / BLC	Power Source	12VDC(±10%)
Level	138.1dB	Power Consumption	12VDC(±10%), 60mA max.
Electronic Shutter Speed	1/60(50)~1/100,000	Option	
Digital Slow Shutter(DSS)	-	Power Source	-
Auto Gain Control(AGC)	MIN, 6, 12, 18, 24, 30, 36, 42, 48, MAX	Power Consumption	-
Day&Night	Electronic D&N		
Noise Deduction	2D-DNR (Y/C, Y, C, OFF)		

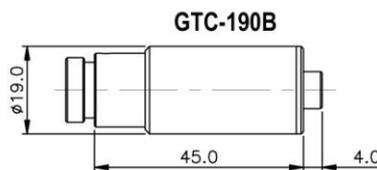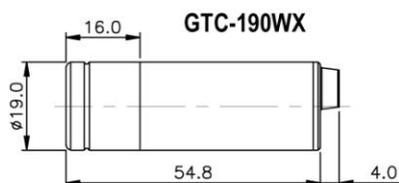

Applications :

- UAV, ROV
- Nucléaire
- Aéronautique
- Robotique
- Défense
- Police

GENITECH Video professionnelle 108 rue H. Barbusse 95100 Argenteuil Tél. 06.37.81.38.31