




- HD-SDI 1080p25
- Focale fixe 3.7mm
- 0.1 Lux
- C mos 1/3 " – 2.12 MPx



## WDR

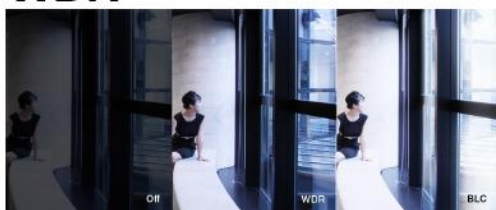

## 3D NR



## DSS



## BLC



## Specifications

Image Sensor	1/3" Progressive Scan CMOS
Effective Pixels	1944(H) x 1092(V), 2.12MP
Max. Video Resolution	1080p@30(25)fps / 720p@60(50)fps
Lens	Fixed Board, Pinhole Lens
Min. Illumination (AGC Max)	0.1 Lux (F1.8, DSS Off) / 0.004 Lux (DSS Max.)
S/N Ratio	>52dB
Shutter Speed	1/30(1/25) s - 1/30,000 s
Day / Night	Electronic D/N
White Balance	AUTO / AUTO EXT / PUSH LOCK / Manual
Digital Zoom Ratio	1x - 20x
WDR	WDR
BLC	Off / On (Area adjustable)
DNR	3DNR
DSS	OFF, 2x~32x
AGC	12dB - 60dB
Other Function(s)	FLIP(H/V/HV), HLMASK, Defog
Privacy Masking	16 zones
Motion Detection	Yes
Video Output (Main)	HD-SDI
Video Output (Service)	Composite (Service Video)
OSD Control	Built-in Controller
OSD Language	ENGLISH, RUSSIAN, SPANISH, GERMAN, FRENCH, PORTUGUESE, JAPANESE
Housing Material	Aluminium
Temperature	Operation: -10°C ~ 50°C (14°F ~ 122°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)
Max. Power Consumption	12VDC 120mA
Dimensions (W x H x D mm)	30 x 30
Weight	Approx. 35 g (0.08 lbs)

