GT-X360

Low Light x36 Zoom Module

Design

Dimensions

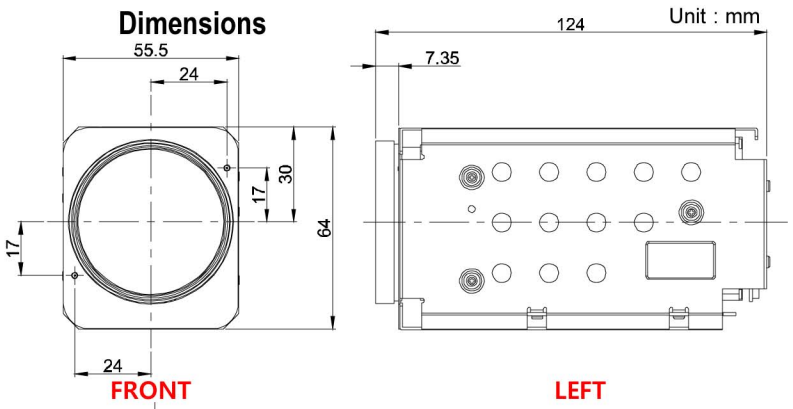

Key Features

- 1/1.9” 2MP Progressive Scan CMOS sensor
- LVDS, AHD, TVI, EX-SDI and Analog
- Optical x36 & Digital x12 Zoom
- Min. Illumination 0.15 lux (Color) / 0.01 lux (B/W), 0.0375 lux (DSS Color) / 0.002 lux (DSS B/W)
- Auto ICR, WDR, Defog
- Privacy Zone Masking, Motion Detection
- VISCA, Pelco-D/P

Technical Specification

- 1/1.9” 2MP Progressive Scan CMOS sensor
- Total Pixels 2010 (H) x 1108 (V), 2.2M Pixels
- Active Pixels 1944 (H) x 1092 (V), 2.1M Pixels
- LVDS 1080p60/50, 1080p30/25, AHD/TVI/EX-SDI 1080p30/25 and Analog 700TVL (w/o WDR)
- S/N Ratio more than 50dB (AGC off)
- Optical x36 & Digital x12 Zoom
- Min. Illumination 0.15 lux (Color) / 0.01 lux (B/W), 0.0375 lux (DSS Color) / 0.002 lux (DSS B/W)
- Auto ICR, WDR, Defog
- Privacy Zone Masking, Motion Detection
- VISCA, Pelco-D/P, CXH
- Cam ID 0 to 255
- Baud Rate 2400 to 115200
- Operating Voltage 9V to 15V DC
- Power Consumption Max. 5W (at 12V DC)
- Operating Temperature -10℃~50℃
- Storage Temperature -20℃~60℃
- Operating Humidity 20%RH to 80%RH
- Storage Humidity 20%RH to 95%RH
- Dimension 55.5 x 64 x 124mm
- Weight 372g