


TF25DA-8B
















- Special design for optimizing the image quality of 3CCD cameras.
- Low-distortion design achieving accurate image input.
- Compact, lightweight and robust design, supporting various systems.
- Faithful color reproduction for 3CCD cameras, best suited for advanced monitoring applications.
- Robust enclosure that can withstanding vibrations and shocks.
 Equipped with locking screws for the iris and the focus.

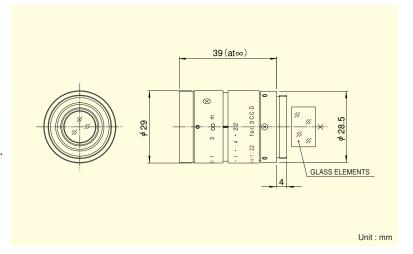

Focal Length (mm)		25
Iris Range		F2.2 ~ F16 · Close
Operation	Focus	Manual
	Iris	Manual
Angle Of View (HXV)	1/3"	10°58′ × 8°14′
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.2
Object Dimensions at M.O.D. (HXV) (mm)	1/3"	42 ×32
Back Focal Distance (in air) (mm)		15.12
Exit Pupil Position (From Image Plane) (mm)		-120
Filter Thread (mm)		$M25.5 \times 0.5$
Mount		C
Mass (g)		60
Remarks		•With Metal Mount •With Locking Screw for Iris and Focus